




HORIZONTAL LIFELINE

FrogLine Steel Mounted INTERMEDIATE Anchor

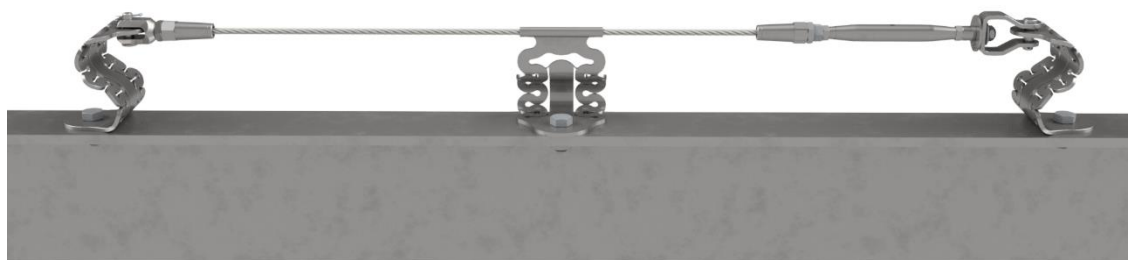

- Energy absorbing lifeline INTERMEDIATE anchor point.
- Specifically for use with permanent horizontal height safety lifeline systems.
- Suits pitches up to 25 degrees.
- Equipped with an engineered energy absorbing region to minimise loads on users and structures in the event of a fall.
- Continuous connection with 8mm stainless steel cable, utilising the Frogline Shuttle System, upto four users per system, two per span.

WHAT AM I USED FOR?

A height safety system anchor point designed to be mounted into metal roof/steel purlin structures as part of a horizontal lifeline system, to limit lifeline span distances.

The building or structure for the anchorages must be assessed by an engineer, unless it is clear to a competent person that the structure is adequate.



STANDARDS

The FrogLine has been tested and manufactured in accordance with AS/NZS 1891.2, ANSI Z359.6-2009, EN 795:2012 and CEN/TS 16415:2013.

COMPLETE UNIT - PRODUCT CODE: STAT.FROGSTE001

Product Parts	Description	Qty	Weight	Material
FROGLINE INT	FrogLine Base Intermediate	1	.679g	316 Stainless Steel
BOLT-M16x50mm-SS	Bolt: M16 x 50mm	1	.103g	316 Stainless Steel
WASHER M16	Washer: M16	1	.005g	316 Stainless Steel
NUT M16	Nut: M16	1	.029g	316 Stainless Steel
			.816g	



© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Version 05.18



FrogLine
In Use



Terms and
Conditions



Installation
Handbook