














LEGEND





























AL	Aluminium alloy	St VZ	Galvanized steel	VA	Stainless steel	EH	One-hand	S	Screw Carabiner	TRI	Trilock
K	Plastic	PA	Polyamide	PES	Polyester	B	Strap	TW	Twistlock	KM	Coated core rope

INFORMATION

	Standard		Size		Number of people		Weight		Diameter		Length
	AS/NZS-Standard		L x W		L x W x H		Material		Colour		Suitable for edges

 Intellectual Property for the products (or components) guaranteed or registered

HARNESSES

	Facade/Window Cleaning		High Rack		Arborists		Construction		Confined Space/ Waste Water		Rope Access/ Rigging
	Roofer/ Carpenter		Power Supplies		Fire Brigade		Metal Construction		Power Transmission		Police/ Military/ Special Forces
	Scaffolding		Anti Corrosion Coating		Rescue		Elevating/Mobile Work Platforms		Tele-communication		Wind Power
	Lift Construction		Rope Courses		Offshore Industry		Mining industry		Maintenance		
	Sternal fall arrest attachment point		Pole strap attachment points		Confined space retrieval sttachment points		Limited free fall attachment point		Dorsal fall arrest attachment point		Climbing protection eyelet

HARNESSES

ROPES




DESCENDERS AND RESCUE DEVICES

	Elastic harness strap		Jacket portion		Abseiling height
	Body width		Expansion in use		Abseiling speed
	Harness length		Rope diameter		Rope model
			Arresting force		Carabiners
			Maximum tensile force		Jacket portion
			Number of standard falls		Maximum tensile force



RETRACTABLE TYPE FALL ARRESTER

	Material housing
	Fasteners, e.g. B45: Webbing, 45 mm
	Approved for horizontal use
	Fall indicator
	Abseiling height





ROPE FALL-ARREST DEVICES

	Rope model
	Carabiner on the fall-arrest device
	Carabiner on the rope



ACCESSORIES

	Max. material load
	Contents

LANYARDS AND WORK POSITIONING ROPES

	Rope diameter
	Rope model
	Carabiner for harness side
	Carabiner for arrest mechanism side




Work position ropes

	Carabiner on the fall-arrest device
	Carabiner on the rope


CARABINERS AND HARDWARE

	Carabiner model
	Gate load kN
	Breaking load kN, vertical
	Eye inside in mm
	Max. opening in mm
	Max. working load (kN)
	Hole diameter

MOBILE ANCHORING DEVICES

	Height set up
	Max. material load
	Abseiling height

HEIGHT ACCESS SYSTEMS

	Carabiner model
---	-----------------









HARNESS STANDARDS

INFORMATION


i



AS/NZS 1891.1:2007 Certified Harness Attachment Points

-  **[1] Fall Arrest Attachment Points** as per AN/NZS 1891.1:2007
-  **[2] Pole Strap Attachment Points.** Side attachment points at waist level are provided exclusively for use in pairs for attachment of a pole strap and designed for use in work positioning applications.
-  **[3] Limited Free Fall Attachment Point.** For protection where there is a danger of a limited fall occurring such as when using a vertical cable or rail system on ladders, masts, towers etc. Also for rope access type work requiring a seated position when hanging freely.
-  **[4] Confined Space Retrieval Attachment Points.** Located on the shoulder straps in a manner that will retain the user in a head up position when being lifted with a Spreader Bar.

Max. user weight in combination with these products:

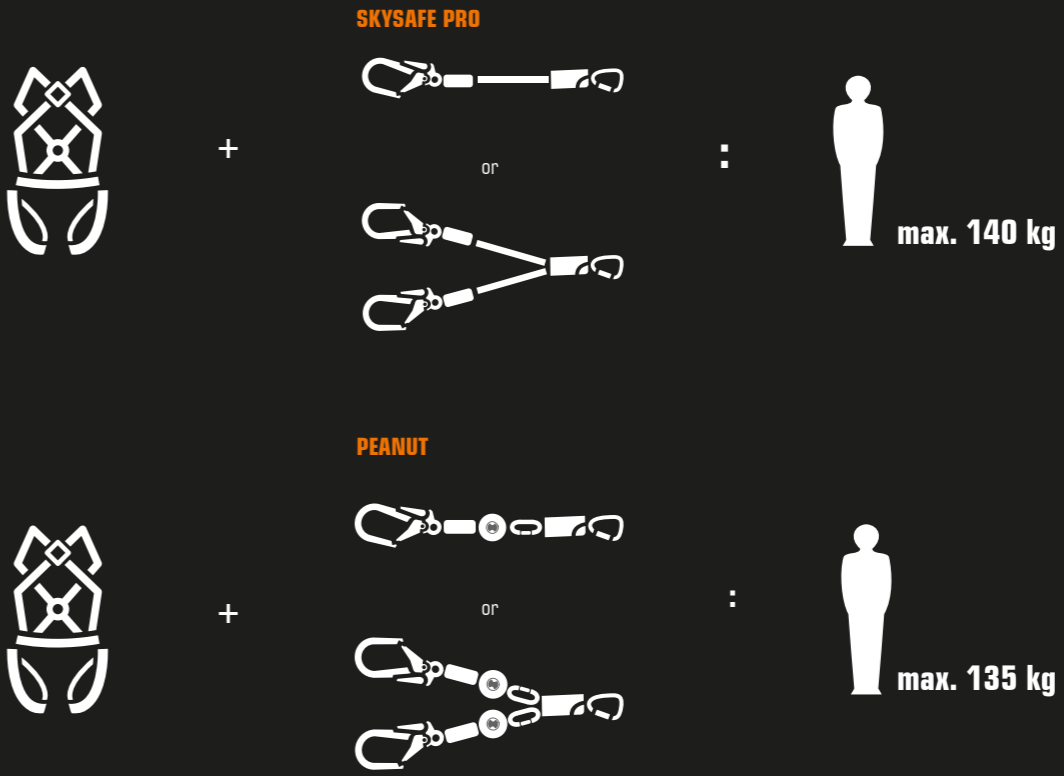



IGNITESERIES

INFORMATION

The IGNITE SERIES sets new standards! With this new harness line, SKYLOTEC presents a thought-out system in terms of ergonomics, comfort and design. All IGNITE variants impress with refined details while retaining the maximum user benefit. Every single part of the safety harness has been completely revised. The new series is distinctive thanks to its unique design and colour scheme.

- All major attachment points stand out with vivid colour coding
• Orange (alloy) for the FALL ARREST attachment points, grey (alloy) for POLE STRAP and LIMITED FREE FALL attachment points.
• Look for the ION, TRION and PROTON models featuring adjustable CONFINED SPACE LOOPS.
• The hip padding is specially adapted to the human anatomy and provides for a perfect fit and comfort, even after prolonged operation in the safety harness.
• All harnesses are standard equipped with shoulder and leg pads, colour coded for ease in donning, orange for the left side & grey for the right side.
• New, patented adjusters prevent any loosening of the webbing during motion.
• The adjusters rotated by 180 degrees offer significant ease of adjustment in the shoulder area, whereby the safety harness can be adjusted for the first time by pulling downwards.
• Excess webbing can be fixed quickly and easily with the clever web coiling feature.
• The IGNITE SERIES is equipped with specially developed OKTALOCK click buckles that are low profile and of Stainless Steel.
• All IGNITE harnesses are available in 3 sizes.

To complete the package, the IGNITE harness range all feature a visible SIZE LABEL on the rear of the harness.



Shoulder and leg padding for easy donning



MOVR for easy adjustment coupled with strong clamping



OKTALOCK - flat, symmetrical click buckles for even load on both parts



Anatomical AIRPAD 3D-hip padding (PROTON)



Preformed gear loops made of textile hose with plastic inlay in dark grey



Foldable retaining eyelets in dark grey

IGNITE ION



- User-friendly, self-explanatory, safe:
• Easy to put on and adjust
• Alloy rear (Dorsal) attachment point
• Large webbing Fall Arrest loops (chest) with wear indicator
• Adjustable Confinement Space loops

Table with 3 columns: Features/Icons, Size 1, Size 2, Size 3. Rows include standards (AS/NZS 1891.1:2007), height ranges (100-1000 mm, 800-1100 mm, 900-1200 mm), weight ranges (XS-M, M-XXL, XXL-5XL), and load capacities (1,1 kg, 1,2 kg, 1,3 kg).





IGNITE TRION

IGNITE PROTON

IGNITE PROTON WIND

ARGON



SWL

140 KG



SWL

140 KG



- Functionality and ergonomics in abundance:
- Asymmetric padding with integrated belt guide
 - Four adjustments points
 - Pole Strap D-rings fit the hips ergonomically
 - Alloy Dorsal & Sternal attachment points
 - Adjustable Confined Space loops

- Scores with comfort, colour concept and design:
- Ergonomic high-tech padding AIRPAD
 - Colour coding to identify the main attachment points
 - Tool eyelets and gear loops for every purpose
 - Adjustable Confined Space loops



SWL

140 KG



- Synthetic rear protection plate on the rear of the AIRPAD waist belt provides protection to the AIRPAD in the tight confines of a wind turbine ladder or even general work at height applications.
- Chest eyelet for belay, but also for rescue
 - Alloy Dorsal & Sternal attachment points
 - Alloy Limited Fall Arrest attachment point on the centre front of the waist belt
 - Adjustable Confined Space loops



SWL

140 KG



- A solid safety harness for rope access that impresses through many improvements in ergonomics and usability with very high wearing comfort. The extremely flexible leg joint is a major contributor to this achievement. Perfectly adjustable safety harness for rope access:
- anatomically shaped padding for maximum wearing comfort
 - chest eyelet for belay, but also for rescue
 - optimal freedom of movement without pressure points

AS/NZS 1891.1:2007		
750-1250 mm	800-1300 mm	900-1400 mm
XS-M	M-XXL	XXL-5XL
1,9 kg	2,0 kg	2,1 kg
G-AUS-1131-XS/M	G-AUS-1131-M/XXL	G-AUS-1131-XXL/5XL

AS/NZS 1891.1:2007		
650-1150 mm	800-1300 mm	950-1450 mm
XS-M	M-XXL	XXL-5XL
2,7 kg	2,8 kg	2,9 kg
G-AUS-1132-XS/M	G-AUS-1132-M/XXL	G-AUS-1132-XXL/5XL

AS/NZS 1891.1:2007		
650-1150 mm	800-1300 mm	950-1450 mm
XS-M	M-XXL	XXL-5XL
2,7 kg	2,8 kg	2,9 kg
G-AUS-1132-WS-XS/M	G-AUS-1132-WS-M/XXL	G-AUS-1132-WS-XXL/5XL

AS/NZS 1891.1:2007		
8000-1200 mm	900-1300 mm	1000-1500 mm
XS-M	M-XXL	XXL-5XL
2,1 kg	2,2 kg	2,5 kg
G-AUS-1133-XS/M	G-AUS-1133-M/XXL	G-AUS-1133-XXL/5XL



SIRRO

INFORMATION

i

The product design award winning **SIRRO** range is still one of the most comfortable full body harnesses on the market today. It is also one of the lightest harnesses and provides optimum load distribution.

- [1] The ring/triangle construction made from selfbinding bands makes up the sternal fall arrest attachment points and ensures an even load distribution in every fall direction. The supplied Carabiner must be used to link the two chest loops.
- [2] The rear fall arrest attachment point made from cross-bands supports the even load distribution in every fall direction.
- [3] The 3-layer perforated padding is breathable and transmits moisture away from the skin.
- [4] With the **SIRRO 4**, angled suspension eyelets transfer the load between the adjustable harness and the edge binding.










NOTE: The supplied karabiner shall be used linking the sternal chest loops



SIRRO 2














     	AS/NZS 1891.1: 2007
	1
 S-M	L-XL
 1,1 kg	1,1 kg
G-AUS-0802-S/M	G-AUS-0802-L/XL

SIRRO 4





     	AS/NZS 1891.1: 2007
	1, 3
 S-M	L-XL
 1,4 kg	1,4 kg
G-AUS-0804-S/M	G-AUS-0804-L/XL









SIRRO MINERS





The **SIRRO MINERS** harness features (in addition to the SIRRO 2 models standard features) a moisture wicking padded waist band c/w miners equipment straps for a self rescuer & battery pack & a click connect buckle on the waist band.

   	AS/NZS 1891.1: 2007
 S-M	L-XL
 1,7 kg	1,7 kg
G-AUS-0807-C-S/M	G-AUS-0807-C-L/XL

BERGMAN MINERS HARNESS





The **BERGMANN** harness utilizes the CS2 harness platform. It features front and rear fall arrest attachment points. A padded waist band and equipment straps to hold a self rescuer and battery pack, both positionable to the back or hip area. Adjustable confined space lifting loops.

   	AS/NZS 1891.1: 2007
 UNISIZE	
 2,0 kg	
G-AUS-0003	

INFORMATION





The ONLY European designed rope access and rescue harness certified to AS/NZS1891.1: 2007. The concept inspiring the design of this harness was for rotor blade inspection on wind turbine generators. Well-known members of the leading rope access associations (IRATA, FISAT & SPRAT) participated in the development of this product. These rope access professionals offering a wealth of knowledge and experience along with industry professionals from Siemens Wind Power set the demands for development of a universal rope access harness. The goal for our team of developers was to build a harness which should outclass anything ever designed before. This “state of the art” harness must be the “standard” for harness ergonomics and rope access technicians for years to come. As a result we developed the **RESCUE PRO 2.0**.

FEATURES:

- Integrated, changeable rope clamp
- V-Shaped back construction with comfort padding
- Round webbing corner for increased comfort in the neck area
- Adjustable, interchangeable shoulder pads
- Double layer leg padding ergonomically shaped for increased comfort
- Great adjustment opportunities for long working sessions
- Loops for sit board attachment: optimal workplace organization
- Textile banderole to protect and cover the marking
- Attached rescue knife
- Front attachment points in different colors for better organization:
- Large ventral attachment point (high quality aluminium)
- 3 sizes: XS/M, M/XXL, XXL/5XL

RESCUE PRO 2.0



     	AS/NZS 1891.1: 2007		
	XS-M	M-XXL	XXL-5XL
	2,6 kg	2,6 kg	2,6 kg
G-AUS-1083-AL-XS/M	G-AUS-1083-AL-M/XXL	G-AUS-1083-AL-XXL/5XL	

INFORMATION



- The **ARG 80** harness demonstrates its functionality in rope supported work, work positioning and rescue.
- A unique stitch pattern maintains the V-shape of the harness to prevent neck chafing.
 - Padding at the waist ensures comfortable back support.
 - Optimal suspension characteristics at the waist attachment point.
 - Equipment loops & tool eyelets allow for secure attachment.

THE **ARG 62 MULTI ACCESS** is the first true 6-point harness. Many well-considered details make it an interesting alternative to the traditional ROPE ACCESS style harnesses.

[1] A chest ascender can easily retro-fit between the waist & chest attachment points.

[2] The elastic underarm harness provides additional comfort.

[3] Eight gear loops on the hip, chest & leg straps allow plenty of space for tools.

[4] The Pole strap d-rings at the side can be folded back when not in use.

[5] Quick lock buckles allow for easy donning.

ARG 80 SOLUTION LIGHT CLICK



ARG 62 MULTI ACCESS



Size table	XS - M	M - XXL	XXL - XXXXL
	85 – 120 cm	90 – 130 cm	100 – 145 cm
Chest size	50 – 75 cm	57 – 85 cm	70 – 95 cm
Leg circumference	150 – 185 cm	165 – 210 cm	175 – 215 cm
Height	44	46	48
Dress size	46	50	52
	54	56	58
	60		

      	AS/NZS 1891.1: 2007		
	UNISIZE		
	2,0 kg		
G-AUS-0080-C-LI			

      	AS/NZS 1891.1: 2007		
	UNISIZE		
	2,6 kg		
G-AUS-0062			



ARG 31 SKYFIZZ

INFORMATION

i

The **ARG 31 SKYFIZZ LIFTER CLICK** is the ideal PREMIUM style harness for all general work at height.


[1] It has an extremely resilient front and rear fall arrest attachment points made from robust steel. The central chest eyelets rest perfectly against the body, thanks to the individual adjustment settings.

[2] The comfortable back padding allows the harness to be put on easily, and the load to be evenly distributed, and is breathable.

[3] The crossed harness straps are sewn on to the back padding and distribute the load perfectly.

[4] Thanks to the quickaction locks, it is simple to handle and put on the harness.

[5] Adjustable confined space lifting loops.

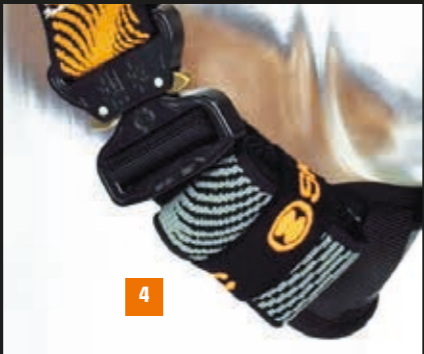

ARG 31 SKYFIZZ LIFTER CLICK



AS/NZS 1891.1: 2007	
1	
M-L	L-XXL
1,6 kg	1,6 kg
G-AUS-0031-LC-M/L	G-AUS-0031-LC-L/XXL

ALLZWECK / MEHRZWECK

INFORMATION

i

The **ALLZWECK harness** is an innovation for all climbing and work positioning roles used in combination with a Personal Energy Absorber, SRL and/or Pole Strap. With its outstanding details it uniformly offers both comfort and technology, optimal freedom of movement and maximum safety.

Adjustable confined space lifting loops.

The **MEHRZWECK harness** is the tradesmans version of the ALLZWECK harness. It features two fall arrest rated webbing loops for frontal attach and standard waist and leg strap connectors.

[1] The Allzweck and Mehrzweck harnesses come with confined space entry loops. Available on the Allzweck and Mehrzweck harnesses.

Adjustable confined space lifting loops.

ALLZWECK SUPERIOR UTILITY



MEHRZWECK TRADEMANS UTILITY



AS/NZS 1891.1: 2007	
S-M	L-XXL
3,4 kg	3,6 kg
G-AUS-0004 -1	G-AUS-0004 -2

AS/NZS 1891.1: 2007	
UNISIZE	
2,0 kg	
G-AUS-0005	



INFORMATION




The **CS 2** is part of our COMPLIANCE level harness range. Available in four options & one size fits all;

[1] CS 2. Features male/female connectors & adjusters at the leg straps. Rear adjustable fall arrest steel D-ring & 2 x fall arrest web loops at the chest & an elasticised click connect chest strap.


[2] CS 2 CLICK. Features CLICK CONNECT buckles & adjusters on the leg straps





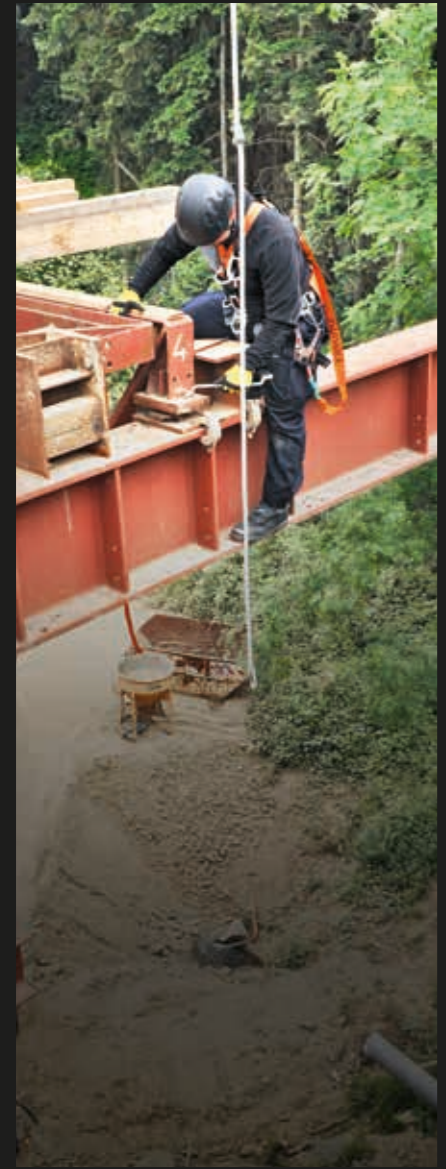

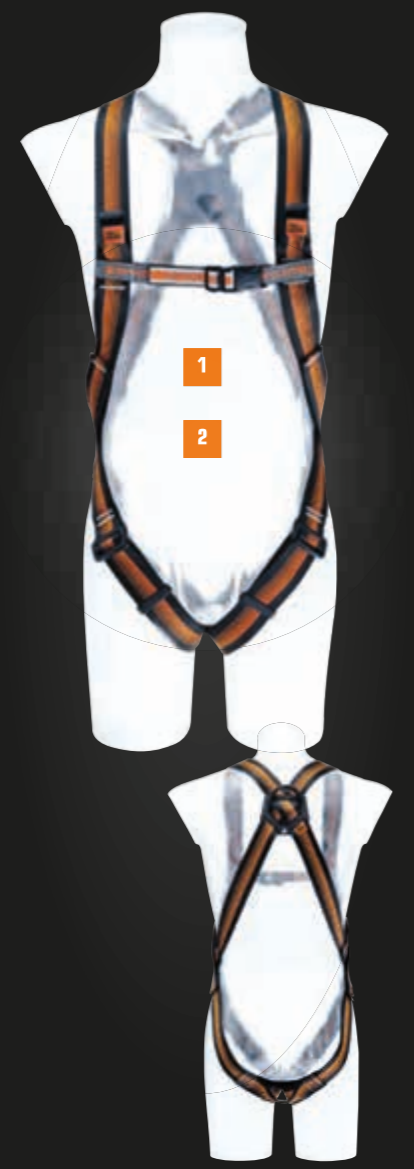

[3] CS 2 CLICK X-PAD. Click connect buckles sewn in moisture wicking padding through the back & shoulder areas.

[4] The CS 2 BFD includes a sewn in 1.8mt shock absorbing lanyard. Hardware: Steel double action snap hook c/w 16kN rated gate.










CS 2




				
 AS/NZS 1891.1: 2007				
 UNISIZE				
 6,9 kg				
G-AUS-0902				








CS 2 CLICK

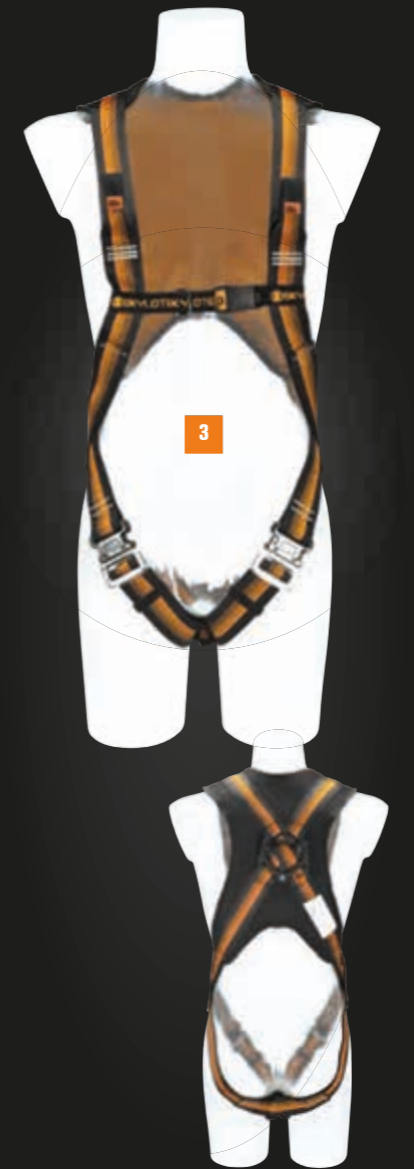

			
			
AS/NZS 1891.1: 2007			
			
UNISIZE			
			
0,9 kg		0,9 kg	
G-AUS-0902-C			









CS 2 CLICK X-PAD




			
	AS/NZS 1891.1: 2007		
	UNISIZE		
	0,9 kg	0,9 kg	
G-AUS-0902-CX			

CS 2 BFD



				
 AS/NZS 1891.1: 2007				
 UNISIZE				
 1,46 kg				
G-AUS-0902-BFD				

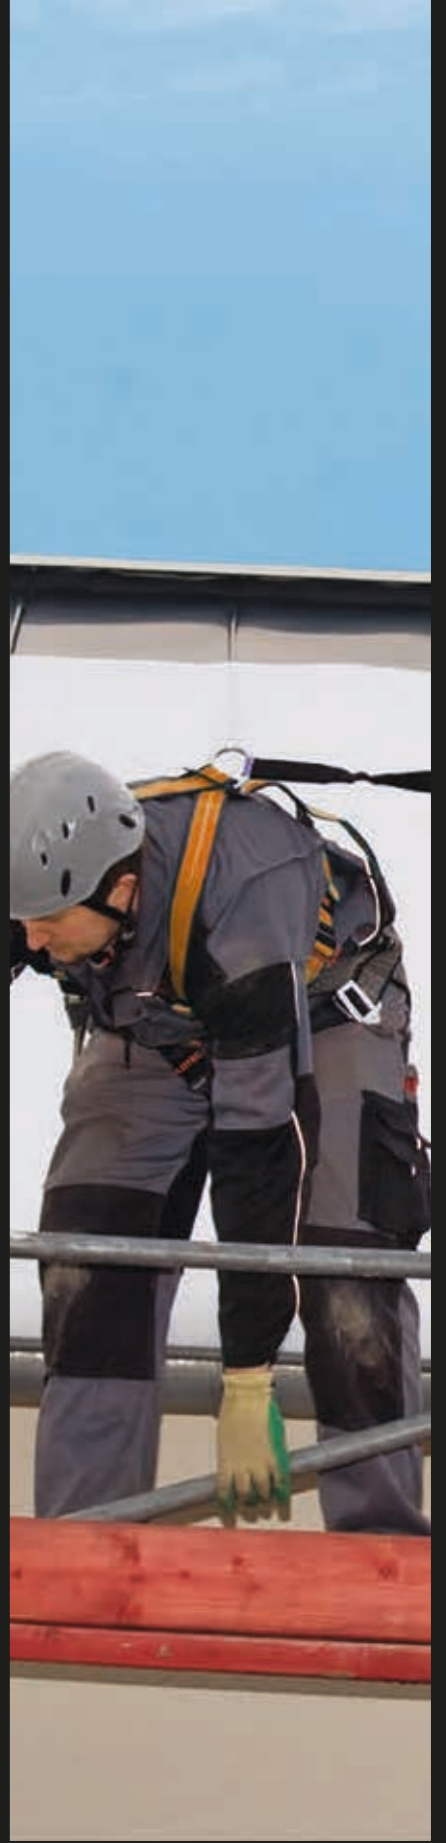



ARG 30

INFORMATION

i

The **ARG 30** series harnesses are part of the compliance range, high performance all-rounders for industry and trade. Light, uncomplicated and maximum safety.

[1] The sternal steel D-ring is a certified fall arrest attachment point. A unique feature is the chest strap quick lock buckle that opens to pass through the d-ring & back onto itself, positioning the d-ring centrally on the chest.

[2] The rear Dorsal steel D ring is designed to be adjusted so as the D ring sits between the shoulder blades of the user.

[3] Adjustment buckles on the shoulder & leg straps to adapt to different body shapes and sizes.

[4] Adjustable confined space lifting loops on the shoulder straps on all models of the ARG 30 range of harnesses..

[5] **ARG 30 FIRE.** All of the standard ARG 30 harness features but with Flame retardant webbing & Nomex threads. A flame retardant webbing waist band and Pole Strap D rings completes the package.





[6] **ARG 30 HR.** The addition of a padded waste band and Pole Strap D rings to the standard ARG 30 model make this a harness for multi tasking.

[7] **ARG 30 BFD.** includes a sewn in 1.8 mt shock absorbing lanyard. Hardware: Steel double action snap hook c/w 16 kN rated gate.



ARG 30



     
 AS/NZS 1891.1: 2007
 UNISIZE
 1,1 kg
G-AUS-0030

ARG 30 HR



     
 AS/NZS 1891.1: 2007
 UNISIZE
 1,8 kg
G-AUS-0030-HR

ARG 30 FIRE



   
 AS/NZS 1891.1: 2007
 UNISIZE
 1,7 kg
G-AUS-0030-F

ARG 30 BFD



   
 AS/NZS 1891.1: 2007
 UNISIZE
 1,9 kg
G-AUS-0030-BFD



INFORMATION

i

For the most frequent application cases we have put several sets together for you consisting of individual components from the sections harnesses, Lanyards (shock absorbing), Adjustable ropes and bags.



 **COMPLIANCE KIT SK 3**



- 1 x G-AUS-0902

Compliance level harness c/w front & rear fall arrest attachment points, adjusters on the leg straps & adjustable elasticised chest strap. Unisize.
- 1 x L-0008-1


Anchor sling (1.0mt) 26kN rated.
- 1 x L-AUS-0005

Shock Absorber pack
- 2 x H-037

Steel screwgate Carabiners
- 1 x L-0362-15

15mt Kernmatle rope (12mm) c/w SK3 Adjuster.
- 1 x ACS-0252

Back pack storage bag

 3,3 kg

SET-AUS-0006

 **COMPLIANCE KIT ERGOGrip (NO SHOCK PACK)**




- 1 x G-AUS-0902

Compliance level harness c/w front & rear fall arrest attachment points, adjusters on the leg straps & adjustable elasticised chest strap. Unisize.
- 1 x L-0008-1

Anchor sling (1.0mt) 26kN rated.
- 1 x L-0032-15

15mt Kernmatle rope (12mm) c/w Ergogrip easy adjuster.
- 1 x ACS-0252

Back pack storage bag

 15 m

 3,0 kg

SET-AUS-0001

 **COMPLIANCE KIT ERGOGrip (WITH SHOCK PACK)**



- 1 x G-AUS-0902

Compliance level harness c/w front & rear fall arrest attachment points, adjusters on the leg straps & adjustable elasticised chest strap. Unisize.
- 1 x L-0008-1

Anchor sling (1.0mt) 26kN rated.
- 1 x L-AUS-0005-AT

Shock Absorber pack c/w double action aluminium snap hooks at each end.
- 1 x L-0032-15

15mt Kernmatle rope (12mm) c/w Ergogrip easy adjuster.
- 1 x ACS-0252

Back pack storage bag

 15 m

 3,4 kg

SET-AUS-0002

 **PREMIUM ROOFERS KIT**



- 1 x G-AUS-0902-CX

CS 2 Click X-Pad. A unique premium level harness c/w moisture wicking padding sewn into the rear shoulder straps. Front & rear fall arrest attachment points, adjusters on the leg straps & click connect buckles on the leg straps.
- 1 x L-0008-1

Anchor sling (1.0mt) 26kN rated.
- 1 x L-AUS-0005-AT

Shock Absorber pack c/w double action aluminium snap hooks at each end.
- 1 x L-0032-15

15mt Kernmatle rope (12mm) c/w Ergogrip easy adjuster.
- 1 x ACS-0252

Back pack storage bag

 15 m

 3,5 kg

SET-AUS-0003

 **ADVANCED ROOFERS KIT**



- 1 x G-AUS-0902-CX

CS 2 Click X-Pad. A unique premium level harness c/w moisture wicking padding sewn into the rear shoulder straps. Front & rear fall arrest attachment points, adjusters on the shoulder & leg straps & click connect buckles on the leg straps.
- 1 x L-0032-15

Ergogrip adjuster on 15 mt Kernmantle rope
- 3 x L-0008-1

1.0 mt continuous loop 26 kN anchor sling
- 1 x L-AUS-0005-AT

Shock pack
- 1 x ACS-0189

Trauma Relief Straps (Pair)
- 5 x H-037

Steel screwgate Carabiners
- 1 x ACS-0009-4

Sturdy Carry bag

 5,2 kg

SET-AUS-0005



INFORMATION





i

The **KOLIBRI** is the top harness for tree care. Thanks to the sliding D technology the user is always in the center of gravity, which enables maximum freedom of movement. The leg loops are reinforced and function like a "split seat board". This combines the freedom of movement of a loop harness with the comfortable seating of a seat board harness. The tie-on loop is interchangeable, click locks and receptacles for a first-aid kit, and the chainsaw stop complete the harness. Available in a straight 'step through' model or with click connect buckles on both the waist band & leg straps.



KOLIBRI



	
	EN 358, EN 813
	UNISIZE
	
G-0200	

KOLIBRI CLICK





Kolibri Click features the unique click connect buckles on the waist & leg straps

	
	EN 358, EN 813
	UNISIZE
	2,2 kg
G-0200-C	

KOLIBRI TOP



	UNISIZE
	0,8 kg
G-0201	

KOLIBRI LOOP



Exchange kit for the sliding D loop

	0,1 kg
G-0201	

ERGOGRIP SK 16

L-AUS-0368-1,8



LORY PRO

A-041



HERKULES RP 4

L-0022-3, L-0022-5



EXPLORER ROPE

R-069-60, R-069-200



ERGOGRIP CORP SIDEWINDER

L-0249-2, L-0249-4, L-0249-5



CHAIN SAW LANYARD

ACS-0072-SKY



H-058

H-074



H-047-8-VA

H-048-10-VA



ACS-175-OR, ACS-176-SW





INFORMATION

i

SKYLOTEC Self Retracting Lifeline devices (SRL) are light and compact and provide the maximum in functional safety and durability.

- Manufacturers inspection is only required once each FIVE years.
- Maintenance costs are low due to the GERMAN engineering & quality.
- The housing is manufactured from break-proof ABS plastic.
- The interior is made of saltwater-proof aluminium.
- The spring return is very small, weighing just 1.5 kg.
- The swivel triple action Carabiner is also equipped with a fall indicator.
- Suitable for HORIZONTAL USE applications with the addition of the L-0005-HSG shock pack attached to the karabiner at the cable end. (NOTE: This feature is available on all cable lengths with the exception of the 20.0mt SRL device)
- Also available with Stainless Steel cable in 6.0 mt, 10.0 mt and 15.0 mt versions.

SKYBOARD



Suitable for use with harnesses featuring a waist attachment point. Adjustable attachment straps.

 L XXL
 1,1 kg
G-0205
G-0205-XL



MINE SPEC HSG DEVICES
HSG HK 3 | 6 | 8 | 10 | 15 | 20



The HSG HK range of SELF RETRACTING LIFELINE DEVICES is compliant with AS/ZS 1891.3 TYPE 2 devices

	EN 360
	275 x 180 x 80 mm
	ind ✓ St5vz mat K
	m 3 m 6 m 8 m 10 m 15 m 20 m
	2,8 kg 3,4 kg 3,6 kg 3,8 kg 7 kg 7,4 kg
	HSG-019-3 HSG-019-6 HSG-019-8 HSG-019-10 HSG-019-15 HSG-019-20



PEANUT I



The PEANUT range of RETRACTABLE LANYARDS is compliant with AS/NZS 1891.3 TYPE 2 devices

	EN 360
	KOBRA TRI
	FS 90 ST
	12 mm
	m 1,8 m 2,5 m 1,8 m 2,5 m
	2,115 kg 2,129 kg 1,577 kg 1,591 kg
	HSG-AUS-021-1,8-4 HSG-AUS-021-2,5-4 HSG-AUS-021-1,8-8 HSG-AUS-021-2,5-8



PENAUT Y



The PEANUT range of RETRACTABLE LANYARDS is compliant with AS/NZS 1891.3 TYPE 2 devices

	EN 360
	KOBRA TRI
	FS 90 ST
	m 1,8 m
	3,592 kg
	HSG-AUS-022-1,8-4



PENAUT Y



The PEANUT range of RETRACTABLE LANYARDS is compliant with AS/NZS 1891.3 TYPE 2 devices

	EN 360
	KOBRA TRI
	KOBRA TRI
	m 1,8 m
	2,516 kg
	HSG-AUS-022-1,8-8



SUSPENSION RELIEF STRAPS



For relief of suspension trauma during a fall.

 0,12 kg
ACS-0189



SPREADER BAR



For use when descending into confined spaces with harnesses featuring lifting loops on the shoulder straps.

AS/NZS 1891.1: 2007
 550 mm
 0,7 kg
L-AUS-0519-55



INFORMATION








The **ARG 110 ERGOTEC TWIN** is the exciting new addition to the Adventure Park & High Ropes course industry. This partially elastic harness has set new trends, linking the comfort advantage of elastic with the safety of static webbing. The elastic underarm piece secures the wearer both comfortably & safely, even in difficult lateral suspension situations the high ropes adventurer may find themselves in. All without excessive pressure in the chest region.

Alloy fittings reduce the weight of the harness and with three sizes available for kids through to the biggest of adults makes this the go to harness for fun at height.

Also features a convenient exposed harness size label to make the park staff's job just a little easier.

 ARG 110 ERGOTEC TWIN







		
 EN 361		
 ✓		
 SIZE		
 1,1 kg	1,2 kg	1,4 kg
G-0110-XS	G-0110	G-0110-XXL

 CS 10/2







The CS 10/2 is a premium level ropes course harness. features waist & dorsal attachment points, Adjusters at the shoulders, waist & legs, 2 x gear loops & a click connect buckle linking the shoulder straps to the lower section of the harness. Available in both adults & kid's sizes.

	
 EN 12277-A/C	
 ADULT	KIDS SIZE
 1,2 kg	1,2 kg
G-0910/2-A	G-0910/2-K

 CS 10/4







The CS 10/4 has the same features as the CS 10/2 but with the addition of a webbing loop attachment point on the rear waist.

	
 EN 12277-A/C, EN 358, EN 361	
 ADULT	KIDS SIZE
 1,2 kg	1,2 kg
G-0910/4-A	G-0910/4-K

 KURT BLACK



The Kurt range of ropes course harnesses features a step through design. A centre waist d-ring attachment point, multiple adjustment options on the shoulders, waist & legs & available in both adults & kids sizes makes the Kurt an ideal entry level harness.

	
 EN 12277-A/C	
 ADULT	KIDS SIZE
 1,1 kg	0,9 kg
G-0912-BL-A	G-0912-BL-K



RECORD

RECORD

RECORD TOP

RECORD STZ

RECORD CACH

TOP SZT

TOP CACH



Lower body harness, no top attachment possible

EN 358, EN 813, EN 12277-C			
750-1300 mm	900-1350 mm	1000-1400 mm	
XS-M	M-L	L-XXL	
750-1300 g	867 g	875 g	
G-1110-XS/M	G-1110-M/XXL	G-1110-XXLI/5XL	

Lower body harness, top attachment possible

EN 358, EN 813, EN 12277-C			
750-1300 mm	900-1350 mm	1000-1400 mm	
XS-M	M-L	L-XXL	
777 g	867 g	875 g	
G-1111-XS/M	G-1111-M/XXLL	G-1111-XXI/5XL	

Harness with removable top part, incl. rope clamp

EN 358, EN 361, EN 813, EN 12277-A/C			
750-1300 mm	900-1350 mm	1000-1400 mm	
XS-M	M-L	L-XXL	
1,6 kg	1,7 kg	1,7 kg	
G-1112-XS/M	G-1112-M/XXL	G-1112-XXI/5XL	

Harness with removable top part, without rope clamp

EN 358:1999, EN 361, EN 813, EN 12277-A/C			
750-1300 mm	900-1350 mm	1000-1400 mm	
XS-M	M-L	L-XXL	
1,5 kg	1,6 kg	1,6 kg	
G-1113-XS/M	G-1113-M/XXL	G-1113-XXI/5XL	

Top part incl. rope clamp, separate

EN 361		
XS/M	L/XXL	
0,83 kg	0,83 kg	
G-1114-XS/M	G-1114-L/5XL	

Top part incl. carabiner, separate

EN 361		
XS/M	L/XXL	
0,75 kg	0,75 kg	
G-1115-XS/M	G-1115-L/5XL	



SKYSAFE PRO

INFORMATION

i

THE SAFEST LANYARD ON THE MARKET TODAY

ONE4ALL — Revolutionary, patented energy absorber with a weight range from 50 kg to 140 kg that always withstands a maximum impact of less than 6 kN at a maximum absorber extension length of 1.75m.

The final tensile strength of 22 kN, also in the absorber, before AND after a fall is exceptional as well. The **SKYSAFE PRO** range is certified to AS/NZS 1891.1: 2007.

The **FLEX** range features elasticised single & twin leg lanyards with a variety of hardware options, reducing the overall length to 1,35 mt.

The **ADJUSTABLE** range (1.8 mt to 1.2 mt) is also available as a single or twin leg lanyard with a variety of hardware options.

The **SKYSAFE PRO** range is complete with a **TIE BACK** option in single leg with a number of hardware options.

The **ADJUSTABLE** range (1.8 mt to 1.2 mt) is also available as a single or twin leg lanyard with a variety of hardware options.

The **SKYSAFE PRO** range is complete with a **TIE BACK** option in single leg with a number of hardware options.


NOTE: All versions of the **SKYSAFE PRO** lanyard range feature sharp edge rated webbing & 16 kn gate rated hardware.



The **SKYSAFE PRO FLEX TWIN** lanyard range is the only twin lanyard on the market today designed specifically to avoid cross loading when used unintentionally e.g. when the unused lanyard is incorrectly attached to a HIP (Pole Strap) D-ring. This **UNIQUE** design feature results in the unused lanyard sliding down the deployed shock absorber. This avoids the possibility of the fallen person left partially suspended from the incorrectly positioned unused lanyard.

GERMAN DESIGN * GERMAN INGENUITY

Load-distance diagram of the revolutionary **SKYSAFE PRO**

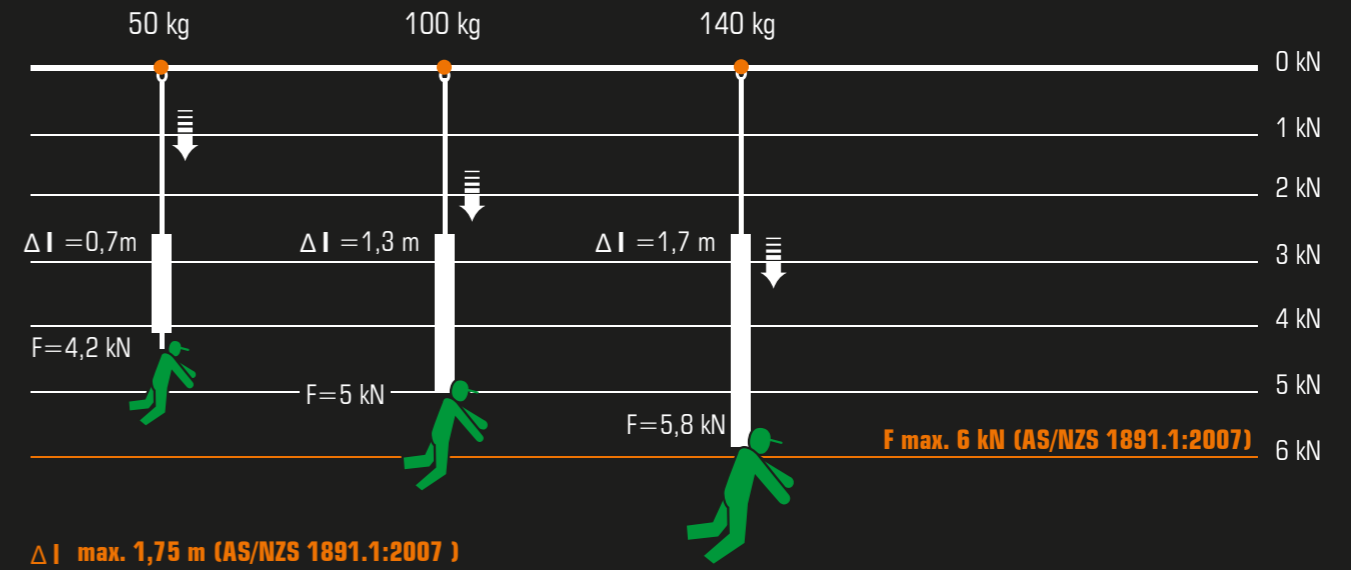

The **SKYSAFE PRO FLEX** range features a **UNIQUE RESCUE LOOP** exposed at the anchorage end of the lanyard after a fall. This feature alone could reduce the recovery time of the fallen worker by more than half!

SKYSAFE PRO FLEX

























SKYSAFE PRO FLEX		SKYSAFE PRO FLEX		SKYSAFE PRO FLEX	
50 KG UP TO 140 KG		50 KG UP TO 140 KG		50 KG UP TO 140 KG	
AS/NZS 1891.1: 2007		AS/NZS 1891.1: 2007		AS/NZS 1891.1: 2007	
SNAP HOOK 23 mm gate opening	SNAP HOOK 23 mm gate opening	SNAP HOOK 23 mm gate opening	FS 64 AL 65 mm gate opening	SNAP HOOK 23 mm gate opening	FS 90 ANSI 60 mm gate opening
22 kN	16 kN	22 kN	16 kN	22 kN	16 kN
1,8 m	PES/ST	1,8 m	PES/AL	1,8 m	PES/AL
1,6 kg	50-140 kg	1,2 kg	50-140 kg	1,7 kg	50-140 kg
L-AUS-0590-1,8		L-AUS-0591-1,8		L-AUS-0592-1,8	








SKYSAFE PRO FLEX Y		SKYSAFE PRO FLEX Y		SKYSAFE PRO FLEX Y	
50 KG UP TO 140 KG		50 KG UP TO 140 KG		50 KG UP TO 140 KG	
AS/NZS 1891.1: 2007		AS/NZS 1891.1: 2007		AS/NZS 1891.1: 2007	
SNAP HOOK 23 mm gate opening	FS 64 AL 60 mm gate opening	SNAP HOOK 23 mm gate opening	FS 90 ANSI 22 mm gate opening	SNAP HOOK 23 mm gate opening	FS 90 ST 60 mm gate opening
22 kN	16 kN	22 kN	16 kN	22 kN	16 kN
1,8 m	PES/AL	1,8 m	PES/AL	1,8 m	PES/ST
2,0 kg	50-140 kg	2,7 kg	50-140 kg	1,8 kg	50-140 kg
L-AUS-0594-1,8		L-AUS-0595-1,8		L-AUS-0715-1,8	

SKYSAFE PRO FLEX		SKYSAFE PRO FLEX		SKYSAFE PRO FLEX	
50 KG UP TO 140 KG		50 KG UP TO 140 KG		50 KG UP TO 140 KG	
AS/NZS 1891.1: 2007		AS/NZS 1891.1: 2007		AS/NZS 1891.1: 2007	
KOBRA TRI 22 mm gate opening	KOBRA TRI 22 mm gate opening	KOBRA TRI 22 mm gate opening	FS 64 AL 65 mm gate opening	KOBRA TRI 22 mm gate opening	FS 90 ANSI 60 mm gate opening
22 kN	16 kN	22 kN	16 kN	22 kN	16 kN
1,8 m	PES/ST	1,8 m	PES/AL	1,8 m	PES/ST
1,7 kg	50-140 kg	1,4 kg	50-140 kg	1,3 kg	50-140 kg
L-AUS-0588-1,8		L-AUS-0589-1,8		L-AUS-0569-1,8	

























SKYSAFE PRO FLEX Y		SKYSAFE PRO FLEX Y		SKYSAFE PRO FLEX Y	
50 KG UP TO 140 KG		50 KG UP TO 140 KG		50 KG UP TO 140 KG	
AS/NZS 1891.1: 2007		AS/NZS 1891.1: 2007		AS/NZS 1891.1: 2007	
KOBRA TRI 22 mm gate opening	FS 64 AL 60 mm gate opening	KOBRA TRI 22 mm gate opening	FS 90 ANSI 60 mm gate opening	STAK TRI 22 mm gate opening	FS 92 85 mm gate opening
22 kN	16 kN	22 kN	16 kN	22 kN	22 kN
1,8 m	PES/AL	1,8 m	PES/ST	1,8 m	PES/ST
2,5 kg	50-140 kg	2,9 kg	50-140 kg	2,9 kg	50-140 kg
L-AUS-0593-1,8		L-AUS-0562-1,8		L-AUS-0563-1,8	



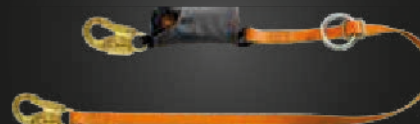

















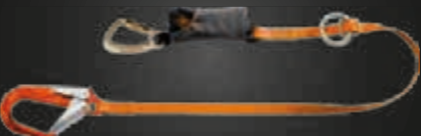



SKYSAFE PRO ADJUSTABLE (SINGLE & TWIN LEG)

SKYSAFE PRO ADJUSTABLE		SKYSAFE PRO ADJUSTABLE		SKYSAFE PRO ADJUSTABLE	
50 KG UP TO 140 KG		50 KG UP TO 140 KG		50 KG UP TO 140 KG	
					
AS/NZS 1891.1: 2007		AS/NZS 1891.1: 2007		AS/NZS 1891.1: 2007	
 SNAP HOOK 23 mm gate opening	 SNAP HOOK 23 mm gate opening	 KOBRA TRI 22 mm gate opening	 FS 64 ALU 60 mm gate opening	 KOBRA TRI 22 mm gate opening	 KOBRA TRI 22 mm gate opening
kN 22 kN	 16 kN	kN 22 kN	 16 kN	kN 22 kN	 16 kN
 1,2 - 1,8 m	 PES/PA/ST	 1,2 - 1,8 m	 PES/PA/ST/AL	 1,2 - 1,8 m	 PES/PA/ST
 1,2 kg	 50-140 kg	 1,2 kg	 50-140 kg	 1,0 kg	 50-140 kg
L-AUS-0272		L-AUS-0529		L-AUS-0583	

SKYSAFE PRO ADJUSTABLE		SKYSAFE PRO ADJUSTABLE	
50 KG UP TO 140 KG		50 KG UP TO 140 KG	
			
AS/NZS 1891.1: 2007		AS/NZS 1891.1: 2007	
 KOBRA TRI 22 mm gate opening	 FS 64 AL OR/GR 60 mm gate opening	 SNAP HOOK 23 mm gate opening	 FS 90 ANSI 60 mm gate opening
kN 22 kN	 16 kN	kN	 16 kN
 1,8 m	 PES/AL	 m	 mat
 2,3 kg	 50-140 kg	 kg	 mat
L-AUS-0710		L-AUS-0709	

SKYSAFE PRO TIE BACK








SKYSAFE PRO ADJUSTABLE		SKYSAFE PRO ADJUSTABLE		SKYSAFE PRO ADJUSTABLE	
50 KG UP TO 140 KG		50 KG UP TO 140 KG		50 KG UP TO 140 KG	
					
AS/NZS 1891.1: 2007		AS/NZS 1891.1: 2007		AS/NZS 1891.1: 2007	
 KOBRA TRI 22 mm gate opening	 FS 90 ANSI 60 mm gate opening	 SNAP HOOK 23 mm gate opening	 FS 64 AL OR/GR 60 mm gate opening	 KOBRA TRI 22 mm gate opening	 FS 90 ANSI 60 mm gate opening
kN 22 kN	 16 kN	kN 22 kN	 16 kN	kN 22 kN	 16 kN
 1,2 - 1,8 m	 PES/PA/ST	 1,2 - 1,8 m	 PES/PA/ST	 1,2 - 1,8 m	 PES/PA/ST
 1,6 kg	 50-140 kg	 2,3 kg	 50-140 kg	 2,5 kg	 50-140 kg
L-AUS-0641		L-AUS-0601		L-AUS-0642	

SKYSAFE PRO TIE BACK		SKYSAFE PRO TIE BACK		SKYSAFE PRO TIE BACK	
50 KG UP TO 140 KG		50 KG UP TO 140 KG		50 KG UP TO 140 KG	
					
AS/NZS 1891.1: 2007		AS/NZS 1891.1: 2007		AS/NZS 1891.1: 2007	
 KOBRA TRI 22 mm gate opening	 FS 64 ALU TRI 60 mm gate opening	 SNAP HOOK 23 mm gate opening	 FS 90 ANSI 60 mm gate opening	 SNAP HOOK 23 mm gate opening	 SNAP HOOK 23 mm gate opening
kN 22 kN	 16 kN	kN 22 kN	 16 kN	kN 22 kN	 16 kN
 1,8 m	 PES/AL	 1,8 m	 PES/AL	 1,8 m	 PES/AL
 1,2 kg	 50-140 kg	 1,6 kg	 50-140 kg	 2,5 kg	 50-140 kg
L-AUS-0596-1,8		L-AUS-0599-1,8		L-AUS-0598-1,8	

BFD LANYARDS

 BFD SK12



	AS/NZS 1891.1: 2007		
	SNAP HOOK 23 mm gate opening		SNAP HOOK 23 mm gate opening
	12 mm		16 kN
	1,2 m	1,5 m	2 m
	1,0 kg	1,0 kg	1,0 kg
L-AUS-0089-1,2		L-AUS-0089-1,5	L-AUS-0089-2

 BFD SK12



	AS/NZS 1891.1: 2007		
	KOBRA TRI 22 mm gate opening		KOBRA TRI 22 mm gate opening
	12 mm		16 kN
	1,2 m	1,5 m	2 m
	0,8 kg	0,8 kg	0,9 kg
L-AUS-0078-1,2		L-AUS-0078-1,5	L-AUS-0078-2


 BFD SK12



	AS/NZS 1891.1: 2007		
	SNAP HOOK 23 mm gate opening		FS 90 ALU 60 mm gate opening
	12 mm		16 kN
	1,5 m	2 m	
	1,1 kg	1,2 kg	
L-AUS-0081-1,5		L-AUS-0081-2	


 BFD Y SK12



	AS/NZS 1891.1: 2007		
	SNAP HOOK 23 mm gate opening		FS 110 ALLOY 110 mm gate opening
	12 mm		16 kN SNAP HOOK
	1,5 m	2 m	
	2,6 kg	2,7 kg	
L-AUS-0199-1,5		L-AUS-0199-2	

 BFD FLEX



	AS/NZS 1891.1: 2007		
	SNAP HOOK 23 mm gate opening		SNAP HOOK 23 mm gate opening
	-		16 kN
	1,5 m	2 m	
	1,1 kg	1,1 kg	
L-AUS-0403-1,5		L-AUS-0403-2	

 BFD FLEX



	AS/NZS 1891.1: 2007		
	SNAP HOOK 23 mm gate opening		FS 90 ST 60 mm gate opening
	-		16 kN SNAP HOOK
	1,5 m	2 m	
	1,1 kg	1,1 kg	
L-AUS-0543-1,5		L-AUS-0543-2	








 BFD Y SK12



	AS/NZS 1891.1: 2007		
	KOBRA TRI 22 mm gate opening		KOBRA TRI 22 mm gate opening
	12 mm		16 kN
	1,5 m	2 m	
	1,4 kg	50-140 kg	
L-AUS-0666-1,5		L-AUS-0666-2	

 BFD Y SK12



	AS/NZS 1891.1: 2007		
	SNAP HOOK 23 mm gate opening		FS 90 ANSI 60 mm gate opening
	12 mm		16 kN
	1,5 m	2 m	
	1,2 kg	50-140 kg	
L-AUS-0667-1,5		L-AUS-0667-2	








 BFD Y SK12



	AS/NZS 1891.1: 2007		
	SNAP HOOK 23 mm gate opening		FS 64 AL 60 mm gate opening
	12 mm		16 kN
	1,5 m	2 m	
	1,7 kg	50-140 kg	
L-AUS-0668-1,5		L-AUS-0668-2	

 BFD Y FLEX



	AS/NZS 1891.1: 2007		
	SNAP HOOK 23 mm gate opening		FS 90 ST 60 mm gate opening
	-		16 kN SNAP HOOK
	1,5 m	2 m	
	1,9 kg	1,9 kg	
L-AUS-0582-1,5		L-AUS-0582-2	

 BFD KOBRA TRI



	AS/NZS 1891.1: 2007		
	KOBRA TRI 22 mm gate opening		
	12 mm		16 kN
	0,3 m		
	0,7 kg		
L-AUS-0005-KOB			


 BFD ATTACK



	AS/NZS 1891.1: 2007		
	ATTACK 22 mm gate opening		
	12 mm		7 kN
	0,3 m		
	0,4 kg		
L-AUS-0005-AT			


BFD RANGE

BFD ADJUSTABLE




AS/NZS 1891.1: 2007	
SNAP HOOK 23 mm gate opening	SNAP HOOK 23 mm gate opening
23 mm	23 mm
16 kN	16 kN
1,04	1,2 m - 1,8 m
L-AUS-0700-1,8	

BFD ADJUSTABLE




AS/NZS 1891.1: 2007	
SNAP HOOK 23 mm gate opening	FS 90 ST 60 mm gate opening
23 mm	59 mm
16 kN	7 kN
-	1,2 m - 1,8 m
L-AUS-0713-1,8	

BFD ADJUSTABLE




AS/NZS 1891.1: 2007	
SNAP HOOK 23 mm gate opening	FS 90 ANSI 60 mm gate opening
23 mm	60 mm
16 kN	16 kN
-	1,2 m - 1,8 m
L-AUS-0701-1,8	

BFD ADJUSTABLE




AS/NZS 1891.1: 2007	
KOBRA TRI	FS 64 AL 60 mm gate opening
23 mm	65 mm
16 kN	16 kN
1,28	1,2 m - 1,8 m
L-AUS-0705-1,8	

BFD ADJUSTABLE




AS/NZS 1891.1: 2007		
SNAP HOOK	FS 90 ST	FS 90 ST
23 mm	65 mm	65 mm
16 kN	16 kN	16 kN
-	1,2 m - 1,8 m	
L-AUS-0711-1,8		

BFD ADJUSTABLE




AS/NZS 1891.1: 2007		
SNAP HOOK	FS 90 ANSI 60 mm gate opening	FS 90 ANSI 60 mm gate opening
23 mm	60 mm	60 mm
16 kN	16 kN	16 kN
-	1,2 m - 1,8 m	
L-AUS-0706-1,8		

BFD ADJUSTABLE




AS/NZS 1891.1: 2007	
SNAP HOOK	FS 64 AL 60 mm gate opening
23 mm	65 mm
16 kN	16 kN
-	1,2 m - 1,8 m
L-AUS-0702-1,8	

BFD ADJUSTABLE




AS/NZS 1891.1: 2007	
KOBRA TRI	KOBRA TRI
22 mm	22 mm
16 kN	16 kN
-	1,2 m - 1,8 m
L-AUS-0703-1,8	

BFD ADJUSTABLE




AS/NZS 1891.1: 2007	
KOBRA TRI	FS 90 ANSI 60 mm gate opening
23 mm	60 mm
16 kN	16 kN
-	1,2 m - 1,8 m
L-AUS-0704-1,8	

BFD ADJUSTABLE




AS/NZS 1891.1: 2007		
SNAP HOOK	FS 64 AL 60 mm gate opening	FS 64 AL 60 mm gate opening
23 mm	65 mm	65 mm
16 kN	28 kN	28 kN
-	1,2 m - 1,8 m	
L-AUS-0708-1,8		

BFD ADJUSTABLE



AS/NZS 1891.1: 2007		
SNAP HOOK	FS 90 ANSI 60 mm gate opening	FS 90 ANSI 60 mm gate opening
23 mm	65 mm	65 mm
16 kN	16 kN	16 kN
-	1,2 m - 1,8 m	
L-AUS-0707-1,8		

BFD ADJUSTABLE



AS/NZS 1891.1: 2007		
SNAP HOOK	FS 64 AL 60 mm gate opening	FS 64 AL 60 mm gate opening
23 mm	65 mm	65 mm
16 kN	28 kN	28 kN
-	1,2 m - 1,8 m	
L-AUS-0712-1,8		

INFORMATION

i

Pole Straps (work positioning lanyards) are for getting into the right working position. These core-sheathed ropes can withstand extreme edge loads, are resistant to abrasion (some SK 12 models supplied with an extra protective abrasion sleeve), remain soft in damp conditions and feature a long service life.

It is an extremely simple matter to adjust the **ERGOGRIP** range with one hand.

ERGOGRIP SK 12

i



AS/NZS 1891 1:2007	
FS 91 20 mm gate opening	STEEL D TRI 22 mm gate opening
12 mm mat PA, AL	16 kN
1,5 m 2 m	
1,1 kg 1,1 kg	
L-AUS-0031-S-1,5	L-AUS-0031-S-2

ERGOGRIP SK 12

i



EN 358, EN 353-2	
OVALOY TRI 22 mm gate opening	ATTACK 22 mm gate opening
12 mm mat PA, AL	7 kN
2 m 3 m	
0,7 kg 0,8 kg	
L-AUS-0030-S-2	L-AUS-0030-S-3

ERGOGRIP SK 16

i



AS/NZS 1891 1:2007	
STEEL D TRI 22 mm gate opening	SNAP HOOK 23 mm gate opening
16 mm mat PA, St	16 kN
2 m 3 m	
1,3 kg 1,5 kg	
L-AUS-0669-2	L-AUS-0669-3

ERGOGRIP SK 16

i



AS/NZS 1891 1:2007	
STEEL D TRI 20 mm gate opening	KOBRA TRI 22 mm gate opening
16 mm mat PA, St	16 kN
2 m 3 m	
1,21 kg 1,4 kg	
L-AUS-0670-2	L-AUS-0670-3

ERGOGRIP SK 16

i



AS/NZS 1891 1:2007	
OVALOY TRI 22 mm gate opening	ATTACK 22 mm gate opening
16 mm mat PA, AL	7 kN
2 m 3 m	
0,9 kg 1,1 kg	
L-AUS-0714-2	L-AUS-0714-3

POLE STRAP

i



Features 44 mm webbing with a protective sleeve & easy adjuster. Steel (16 kN gate rated double action snap hooks)

AS/NZS 1891 1:2007	
SNAP HOOK 23 mm gate opening	
16 kN	
1,15 m - 2,50 m 1,15 m - 3,00 m	
0,8 kg 0,87 kg	
L-AUS-0581-250	L-AUS-0581-300

ERGOGRIP CORE S15

i



with steel inlay & swivel eye triple action karabiner at the rope end

 EN 358			10 kN	
 HMS PASSO TRI 26 mm gate opening		SIDE-WINDER TRI 22 mm gate opening		
 15 mm	mat		VA, AL, PES	
 2 m	3 m	4 m	5 m	
 1,57 kg	1,94 kg	2,32 kg	2,69 kg	
L-0249-2	L-0249-3	L-0249-4	L-0249-5	

HERKULES RP4 S16

i



Basic wire re-inforced rope lanyard with length adjuster & protective sleeve

EN 358:1999	
STEEL D TRI 22 mm gate opening	FS 51 ST 20 mm gate opening
16 mm mat ST, PP	
3 m 5 m	
2,5 kg 3,4 kg	
L-0022-3	L-0022-5

ERGOGRIP SK 16

i



EN 353-2, EN 358	
HMS TWISTLOCK ALU 20 mm gate opening	ATTACK 22 mm gate opening
16 mm mat PA, AL	7 kN
2 m 5 m	
0,9 kg	
L-0204-2	L-0204-5

ERGOGRIP SK 16

i



EN 353-2, EN 358	
STEEL D TRI 20 mm gate opening	KOBRA (STEEL) TRI 22 mm gate opening
16 mm mat PA, AL	16 kN
2 m 4 m	
0,9 kg	
L-0208-2	L-0208-4

ERGOGRIP SK 16

i



EN 353-2:2002, EN 358:1999	
FS 64 AL 60 mm gate opening	STEEL D TRI 20 mm gate opening
16 mm mat PA, St, Al	16 kN
1,8 m	
1,6 kg	
L-AUS-0368-1,8	

ANCHORAGE SLINGS

Compliant with AS/NZS 1891.4: Section 3. Anchorages

BEAMSTRAP 25 kN



EN 354, EN 795-B, EN 566
matPA PES/ST PA
646 g 769 g 911 g
1 m 1,5 m 2 m
Ø 85 mm
L-AUS-0647-1 L-AUS-0647-1,8 L-AUS-0647-1,5

LOOP SEP 40 kN



EN 354, EN 566, EN 795-B
matPES, St
Ø 30 mm KOBRA TW
0,75 m 1,35 m 2 m
476 g 655 g 854 g
L-0397-0,75 L-0397-1,35 L-0397-2





LOOP SEP 40 kN



EN 354, EN 795-B, EN 566 , ANSI Z359.1:2007
matPES
Ø 30 mm
0,75 m 1,35 m 2 m
277 g 414 g 616 g
L-0321-0,75 L-0321-1,35 L-0321-2

LOOP 26 kN






















	EN 354, EN 795, EN 566			25 mm											
	mat	PA		PA	PA	PA	PA	PA							
	0,05 kg	0,06 kg	0,08 kg	0,10 kg	0,12 kg	0,15 kg	0,17 kg	0,19 kg							
	0,4 m	0,6 m	0,8 m	1 m	1,2 m	1,5 m	1,8 m	2 m							
col															
L-0008-0,4		L-0008-0,6		L-0008-0,8		L-0008-1		L-0008-1,2		L-0008-1,5		L-0008-1,8		L-0008-2	

ANCHORAGE SLINGS

LOOP 35 kN



	EN 354, EN 795-B, EN 566			25 mm				
mat	PA	PA	PA	PA	PA	PA	PA	
	61 g	91 g	108 g	141 g	158 g	196 g	233 g	258 g
h m	0,4 m	0,6 m	0,8 m	1 m	1,2 m	1,5 m	1,8 m	2 m
col								
	L-0010-GE-0,4	L-0010-GE-0,6	L-0010-GE-0,8	L-0010-GE-1	L-0010-GE-1,2	L-0010-GE-1,5	L-0010-GE-1,8	L-0010-GE-2
col								
	L-0010-SW-0,4	L-0010-SW-0,6	L-0010-SW-0,8	L-0010-SW-1	L-0010-SW-1,2	L-0010-SW-1,5	L-0010-SW-1,8	L-0010-SW-2

CAB HERKULES S 12 22 kN



EN 354, EN 795-B
matST, Polypropylen
Ø 12 mm
1 m 2 m 3 m
564 g 740 g 920 g
L-0001-1 L-0001-2 L-0001-3

TYVEK® LANYARD PROTECTOR



matTYVEK
1500 x 100 mm
col
40 g
ACS-0142





PEANUT

INFORMATION

i

The **PEANUT** range of ultra-compact retractable lanyard devices, like the **SKYSAFE PRO** range of lanyards is already equipped with the One-4-All shock absorber.

Key features;

- A weight range from 50kg to 135 kg
- Edge certified
- Suitable for horizontal use applications
- A unique zip lock cover over the shock pack. This allows it to be removed for 100% inspection & maintenance i.e. if the device becomes wet the zip lock cover can be removed & the shock pack laid out to dry, prolonging the life of the product
- The PEANUT devices are certified for anchorage as low as foot level. (NOTE: Skylotec recommends ALL fall arrest product be anchored at shoulder height or above as a 'BEST PRACTICE')
- Certified & suitable for use in tasks involving Elevating Work Platforms (EWP)

The **PEANUT** range of RETRACTABLE LANYARDS is compliant with AS/NZS 1891.3 TYPE 2 devices.



RETRACTABLE TYPE
FALL ARRESTER



PEANUT	PEANUT	PEANUT																																																						
50 KG UP TO 135 KG	50 KG UP TO 135 KG	50 KG UP TO 135 KG																																																						
<div><div></div><div></div></div> <table><tr><td> EN 360</td><td>mat</td><td>PES, PA, AL, ST</td></tr><tr><td> KOBRA TRI 22 mm gate opening</td><td> FS 90 ANSI 60 mm gate opening</td><td></td></tr><tr><td> Textile Strap 25 mm</td><td> 86 x 62 x 103 mm</td><td></td></tr><tr><td> 1,7 kg</td><td>1,8 kg</td><td></td></tr><tr><td> 1,8 m</td><td>2,5 m</td><td></td></tr><tr><td>HSG-AUS-021-1,8-4</td><td>HSG-AUS-021-2,5-4</td><td></td></tr></table>	EN 360	mat	PES, PA, AL, ST	KOBRA TRI 22 mm gate opening	FS 90 ANSI 60 mm gate opening		Textile Strap 25 mm	86 x 62 x 103 mm		1,7 kg	1,8 kg		1,8 m	2,5 m		HSG-AUS-021-1,8-4	HSG-AUS-021-2,5-4		<div><div></div><div></div></div> <table><tr><td> EN 360</td><td>mat</td><td>PES, PA, AL, ST</td></tr><tr><td> KOBRA TRI 22 mm gate opening</td><td> KOBRA TRI 22 mm gate opening</td><td></td></tr><tr><td> Textile Strap 25 mm</td><td> 86 x 62 x 103 mm</td><td></td></tr><tr><td> 1,7 kg</td><td>1,8 kg</td><td></td></tr><tr><td> 1,8 m</td><td>2,5 m</td><td></td></tr><tr><td>HSG-AUS-021-1,8-8</td><td>HSG-AUS-021-2,5-8</td><td></td></tr></table>	EN 360	mat	PES, PA, AL, ST	KOBRA TRI 22 mm gate opening	KOBRA TRI 22 mm gate opening		Textile Strap 25 mm	86 x 62 x 103 mm		1,7 kg	1,8 kg		1,8 m	2,5 m		HSG-AUS-021-1,8-8	HSG-AUS-021-2,5-8		<div><div></div><div></div></div> <table><tr><td> EN 360</td><td>mat</td><td>PES, PA, ST</td></tr><tr><td> KOBRA TRI 22 mm gate opening</td><td> FS 64 ALU 60 mm gate opening</td><td></td></tr><tr><td> Textile Strap 25 mm</td><td> 86 x 62 x 103 mm</td><td></td></tr><tr><td> 1,7 kg</td><td>1,8 kg</td><td></td></tr><tr><td> 1,8 m</td><td>2,5 m</td><td></td></tr><tr><td>HSG-AUS-021-1,8-9</td><td>HSG-AUS-021-2,5-9</td><td></td></tr></table>	EN 360	mat	PES, PA, ST	KOBRA TRI 22 mm gate opening	FS 64 ALU 60 mm gate opening		Textile Strap 25 mm	86 x 62 x 103 mm		1,7 kg	1,8 kg		1,8 m	2,5 m		HSG-AUS-021-1,8-9	HSG-AUS-021-2,5-9	
EN 360	mat	PES, PA, AL, ST																																																						
KOBRA TRI 22 mm gate opening	FS 90 ANSI 60 mm gate opening																																																							
Textile Strap 25 mm	86 x 62 x 103 mm																																																							
1,7 kg	1,8 kg																																																							
1,8 m	2,5 m																																																							
HSG-AUS-021-1,8-4	HSG-AUS-021-2,5-4																																																							
EN 360	mat	PES, PA, AL, ST																																																						
KOBRA TRI 22 mm gate opening	KOBRA TRI 22 mm gate opening																																																							
Textile Strap 25 mm	86 x 62 x 103 mm																																																							
1,7 kg	1,8 kg																																																							
1,8 m	2,5 m																																																							
HSG-AUS-021-1,8-8	HSG-AUS-021-2,5-8																																																							
EN 360	mat	PES, PA, ST																																																						
KOBRA TRI 22 mm gate opening	FS 64 ALU 60 mm gate opening																																																							
Textile Strap 25 mm	86 x 62 x 103 mm																																																							
1,7 kg	1,8 kg																																																							
1,8 m	2,5 m																																																							
HSG-AUS-021-1,8-9	HSG-AUS-021-2,5-9																																																							
PEANUT	PEANUT	PEANUT																																																						
50 KG UP TO 135 KG	50 KG UP TO 135 KG	50 KG UP TO 135 KG																																																						
<div><div></div><div></div></div> <table><tr><td> EN 360</td><td>mat</td><td>PES, PA, AL, ST</td></tr><tr><td> SNAP HOOK 23 mm gate opening</td><td> SNAP HOOK 23 mm gate opening</td><td></td></tr><tr><td> Textile Strap 25 mm</td><td> 86 x 62 x 103 mm</td><td></td></tr><tr><td> 1,7 kg</td><td>1,8 kg</td><td></td></tr><tr><td> 1,8 m</td><td>2,5 m</td><td></td></tr><tr><td>HSG-AUS-021-1,8-10</td><td>HSG-AUS-021-2,5-10</td><td></td></tr></table>	EN 360	mat	PES, PA, AL, ST	SNAP HOOK 23 mm gate opening	SNAP HOOK 23 mm gate opening		Textile Strap 25 mm	86 x 62 x 103 mm		1,7 kg	1,8 kg		1,8 m	2,5 m		HSG-AUS-021-1,8-10	HSG-AUS-021-2,5-10		<div><div></div><div></div></div> <table><tr><td> EN 360</td><td>mat</td><td>PES, PA, AL, ST</td></tr><tr><td> SNAP HOOK 23 mm gate opening</td><td> FS 64 ALU 60 mm gate opening</td><td></td></tr><tr><td> Textile Strap 25 mm</td><td> 86 x 62 x 103 mm</td><td></td></tr><tr><td> 1,7 kg</td><td>1,8 kg</td><td></td></tr><tr><td> 1,8 m</td><td>2,5 m</td><td></td></tr><tr><td>HSG-AUS-021-1,8-11</td><td>HSG-AUS-021-2,5-11</td><td></td></tr></table>	EN 360	mat	PES, PA, AL, ST	SNAP HOOK 23 mm gate opening	FS 64 ALU 60 mm gate opening		Textile Strap 25 mm	86 x 62 x 103 mm		1,7 kg	1,8 kg		1,8 m	2,5 m		HSG-AUS-021-1,8-11	HSG-AUS-021-2,5-11		<div><div></div><div></div></div> <table><tr><td> EN 360</td><td>mat</td><td>PES, PA, AL, ST</td></tr><tr><td> SNAP HOOK 23 mm gate opening</td><td> FS 90 ANSI 60 mm gate opening</td><td></td></tr><tr><td> Textile Strap 25 mm</td><td> 86 x 62 x 103 mm</td><td></td></tr><tr><td> 1,7 kg</td><td>1,8 kg</td><td></td></tr><tr><td> 1,8 m</td><td>2,5 m</td><td></td></tr><tr><td>HSG-AUS-021-1,8-12</td><td>HSG-AUS-021-2,5-12</td><td></td></tr></table>	EN 360	mat	PES, PA, AL, ST	SNAP HOOK 23 mm gate opening	FS 90 ANSI 60 mm gate opening		Textile Strap 25 mm	86 x 62 x 103 mm		1,7 kg	1,8 kg		1,8 m	2,5 m		HSG-AUS-021-1,8-12	HSG-AUS-021-2,5-12	
EN 360	mat	PES, PA, AL, ST																																																						
SNAP HOOK 23 mm gate opening	SNAP HOOK 23 mm gate opening																																																							
Textile Strap 25 mm	86 x 62 x 103 mm																																																							
1,7 kg	1,8 kg																																																							
1,8 m	2,5 m																																																							
HSG-AUS-021-1,8-10	HSG-AUS-021-2,5-10																																																							
EN 360	mat	PES, PA, AL, ST																																																						
SNAP HOOK 23 mm gate opening	FS 64 ALU 60 mm gate opening																																																							
Textile Strap 25 mm	86 x 62 x 103 mm																																																							
1,7 kg	1,8 kg																																																							
1,8 m	2,5 m																																																							
HSG-AUS-021-1,8-11	HSG-AUS-021-2,5-11																																																							
EN 360	mat	PES, PA, AL, ST																																																						
SNAP HOOK 23 mm gate opening	FS 90 ANSI 60 mm gate opening																																																							
Textile Strap 25 mm	86 x 62 x 103 mm																																																							
1,7 kg	1,8 kg																																																							
1,8 m	2,5 m																																																							
HSG-AUS-021-1,8-12	HSG-AUS-021-2,5-12																																																							

HSG HK

INFORMATION

i

HSG HK 3 | 4 | 5

WITH HSG-0005-F-HSG

HSG HK 15 | 20



WITH HSG-0005-F-HSG
(EXCLUDES 20 MT)

SKYLOTEC Self Retracting Lifeline devices (SRL) are light and compact and provide the maximum in functional safety and durability.

- Manufacturers inspection/recertification is only required once every FIVE years. (NOTE: A qualified Height Safety Equipment Inspector shall inspect SRL's every SIX months & RECORD these inspections in the supplied user Instruction manual)
- Maintenance costs are low due to the GERMAN engineering & quality.
- The housing is manufactured from break-proof ABS plastic.
- The interior is made of saltwater-proof aluminium.
- The spring return is very small, weighing just 1.5kg.
- The swivel double action snap hook (HSG-002 models) & swivel triple action Carabiner (HSG-019 models) is also equipped with a fall indicator.
- Suitable for HORIZONTAL USE applications with the addition of the L-0005-HSG shock pack attached to the snap hook at the cable end. (NOTE: This feature is available on all cable lengths with the exception of the 20.0 mt SRL device)
- Also available with Stainless Steel cable in 6.0mt, 10.0mt and 15.0mt versions.


The **HSG HK** range of SELF RETRACTING LIFELINE devices is compliant with AS/NZS 1891.3 TYPE 2 devices.





S	EN 360	mat	K
			St5vz
ind	✓		210 x 145 x 70 mm
m	3 m	4 m	5 m
	2,8 kg	2,9 kg	3 kg
HSG-002-3	HSG-002-4	HSG-002-5	

HSG HK 6 | 8 | 10

WITH HSG-0005-F-HSG



S	EN 360	mat	K
			St5vz
ind	✓		275 x 180 x 80 mm
m	6 m	8 m	10 m
	3,4 kg	3,6 kg	3,8 kg
HSG-002-6	HSG-002-8	HSG-002-10	



S	EN 360	mat	K
			375 x 265 x 100 mm
ind	✓		St5vz
m	15 m	20 m	
	7 kg	7,4 kg	
HSG-002-15	HSG-002-20		

HSG

The HSG HR range of SELF RETRACTING LIFELINE (SRL) devices is compliant with AS/NZS 1891.3 TYPE 2 devices.

HSG HR 15

For use attached to an anchor above the operator

HSG HR 15 T

Supplied with a bracket to attach to the TRIBOC

HSG HR 15 JP

With bracket to attach to the JACKPOD Tripods & Davits



SELF RETRACTING LIFELINE (SRL) DEVICES c/w EMERGENCY RESCUE CAPABILITY The HSG HR range of SRL devices, as well as the the self retracting lifeline feature also enable the operator (in the case of an emergency) to activate the handle mechanism to raise or lower the fallen worker to safety.

EN 360
350 x 210 x 125 mm
mat AL St5vz
ind ✓
m 15 m
7,7 kg
HSG-004-15

EN 360, EN 1496-B
350 x 210 x 125 mm
mat AL St5vz
ind ✓
m 15 m
13,4 kg
HSG-004-15-T

EN 360, EN 1496-B
300 x 286 x 223 mm
mat AL St5vz
ind ✓
m 15 m
13,4 kg
HSG-004-15-JP

RETRACTABLE TYPE FALL ARRESTER



MARBLE

Heavy duty webbing SRL



EN 360
T Textil-Band 25 mm mat AL
141 x 107 x 61 mm 190 x 157 x 61 mm
m 3,3 m 6,6 m
1,6 kg 2,7 kg
HSG-037-3,3 HSG-037-6,6

HSG KOMPAKT




EN 360 : 2002
110 x 110 x 80 mm
1,1 kg 2,5 m
HSG-001-2,5

**SHOCK ABSORBER
0,3 M**



Required for horizontal use with the HSG range of Self Retracting Lifelines (SRL's).
NOTE: Suitable for use on all SRL's with the exception of the HSG HK 20 mt device.

EN 355
ind ✓
mat PA, St 0,4 kg
380 x 50 x 30 mm
L-0005-F-HSG

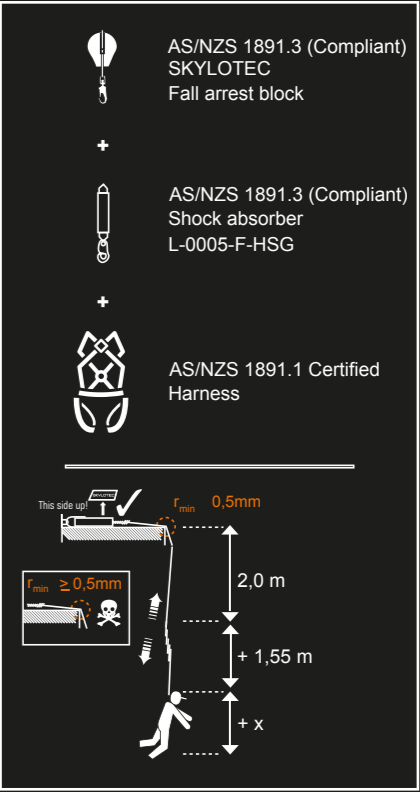



JACKPOD DAVIT

INFORMATION

i







Flexible fall prevention for working in confined spaces is now easier than ever with the new **JACKPOD** davit arm and tripod systems. The portable and stepwise adjustable systems require only a small working base area and are easy to transport and store thanks to their low weight and volume. High-quality finished aluminium and galvanised steel offer high ageing resistance. The **JACKPOD DAVIT** & **JACKPOD TRIPOD** systems are suitable for use as anchorages for CONFINED SPACE ENTRY. Both systems are certified as anchoring points according to EN 795 B & compliant to the AS/NZS 5532: 2013 with a max. load capacity of 280 kg (for up to 2 persons with a weight of 140 kg each) and can be combined with winches and Self Retracting Lifeline devices. NOTE: Future catalogues will require new images for the Jackpod range showing the person attached via a Spreader Bar.



 JACKPOD DAVIT SET



JP-100-1 (JP-001-1 + JP-002-1 + JP-003-1)
h=2186-2416mm
JP-100-2 (JP-001-1 + JP-002-2 + JP-003-1)
h=2490-2720mm
JP-100-3 (JP-001-2 + JP-002-1 + JP-003-1)
h=2491-2711mm
JP-100-4 (JP-001-2 + JP-002-2 + JP-003-1)
h=2795-3015mm

					
	EN 795				
mat	AL/ST GVZ				
	42,6 kg	44,5 kg	44,5 kg	46,4 kg	
JP-100-1	JP-100-2	JP-100-3	JP-100-4		



 JACKPOD DAVIT UM



upper mast	
	EN 795
mat	AL/ST GVZ
	1170 - 1400 mm 1475 - 1695 mm
	9,5 kg 11,4 kg
JP-001-1	JP-001-2




 JACKPOD DAVIT LM



lower mast	
	EN 795
mat	AL
	1060 mm 1320 mm
	5,4 kg 7,3 kg
JP-002-1	JP-002-2


 JACKPOD DAVIT BRACKET



	EN 795	
mat	AL/ST GVZ	
		
	2,0 kg	2,0 kg
JP-010-1	JP-010-2	



 JACKPOD BASE FLOOR MOUNT



Other JACKPOD BASE options available	
	EN 795
mat	ST FVZ
	8,8 kg
JP-003-4	

 JACKPOD BASE WALL MOUNT



Other JACKPOD BASE options available	
	EN 795
mat	ST FVZ
	4,7 kg
JP-003-5	

 JACKPOD BASE



	EN 795	Ø 1905 mm
mat	AL/ST GVZ	
	27,7 kg	
JP-003-1		

JACKPOD TRI

 HSG HR 15 JP

 JACKPOD TRI I

INFORMATION

i

In two size versions, the **JACKPOD TRIPODS** cover the areas of the vertical entry with a variable height adjustment from 1.2 to an incredible 3.1 meters.

 **JACKPOD TRI II**



Self Retracting Lifeline (15 mt) with EMERGENCY RESCUE capability. Includes a mounting bracket that fits to both the JACKPOD DAVIT & TRI range.

NOTE: To mount the JACKPOD WINCHES to the Tripods requires seperate mounting brackets.


 EN 360, EN 1496-B

 300 x 286 x 223 mm

 AL  St5vz

 ✓


 15 m


 13,4 kg

HSG-004-15-JP

With one re-direction pulley



 EN 795

 1220 x 2260 mm


 AL EL

 16,6 kg

JP-011-1

With three re-direction pulleys



 EN 795

 1650 x 3162 mm

 AL EL

 23,7 kg

JP-011-2

 **JACKPOD WINCH**



 **JACKPOD WINCH
OVERLOAD PROTECT**



 **JACKPOD WINCH
DIRECT DRIVE**



Winches require a mounting bracket for both the Davits & Tripods.


200 kg Overload protection coupling


 EN 795, EN 1496  ST GVZ Stainless Steel Cable

 18 m 45 m

 14 kg 18 kg


JP-008-1 **JP-008-2**


 EN 795


 ST GVZ

 2,28 kg

JP-009-3

 EN 795

 ST GVZ

 0,86 kg

JP-009-2

 **JACKPOD BOOM
BASE**



 **JACKPOD BOOM
BASE**



 **JACKPOD BASE
BARREL MOUNT FIX**



Base for horizontal entry systems


 EN 795  406 - 1370 mm

 AL/ST GVZ


 36,4 kg

JP-006

Horizontal entry system arm & winch mount


 EN 795

 AL/ST GVZ

 16,8 kg

JP-005

Parapet anchor

 EN 795

 ST FVZ

 20,4 kg

JP-003-7

TRIBOC

INFORMATION

i

The **TRIBOC** is a multifunction power package on three legs. It is ideal for securing and rescuing personnel as well as for lifting loads. It is easy to use, and the tripod offers complete safety. The legs can be set in eight ways. The standard steel head offers four anchoring points. Hoisting and automatic fall arrest block can be easily taken out and transported separately. The TRIBOC has an integrated chain and is suited for a maximum work load limit of 500 kg.

TRIBOC

HSG HR 15 T



 
 795:B, CEN/TS 16415
mat AL/St VZ  18 kg
 1573 - 2524 mm  2
 1605 - 2495 mm
AP-004

Self Retracting Lifeline with EMERGENCY RESCUE capability. Includes a mounting bracket to Tripod.

 EN 360, EN 1496/B
 13 kg  15 m
 2 mat AL/ST
 15 m
 350 x 210 x 125 mm
HSG-004-15-T

MOBILE ANCHORING DEVICES

TRIBOC CHAIN




TRIBOC T WIND





SAFETY ROLL II 3:1 KITS



Ideal for use with the Tripod for raising/lowering & work positioning activities. Can be used in rescue procedures.

 1 kg  -
mat St VZ
 -
AP-009

Supplied with the Tripod leg bracket			
 11 kg			
mat St  15 m			
 220 x 180 x 180 mm			
ACS-0036-15-T			

 T DYNAMIC LONGLIFE 9 mm			
 EN 341, EN 1496  2			
m 40 m 60 m 65 m			
 6,0 kg 6,6 kg 6,9 kg			
SET-241-50 SET-241-60 SET-241-65			





TRIBOC BAG


SAFETY ROLL II 4:1 KITS



Ideal for use with the Tripod for raising/ lowering & work positioning activities. Can be used in rescue procedures.

mat PES  			
 1750 x 220 x 220 mm  0,91 kg			
ACS-0013			

 T DYNAMIC LONGLIFE 9 mm			
 EN 341, EN 1496  2			
m 40 m 60 m 70 m 90 m			
 3,4 kg 4,6 kg 5,2 kg 6,4 kg			
SET-239-40 SET-239-60 SET-239-70 SET-239-90			

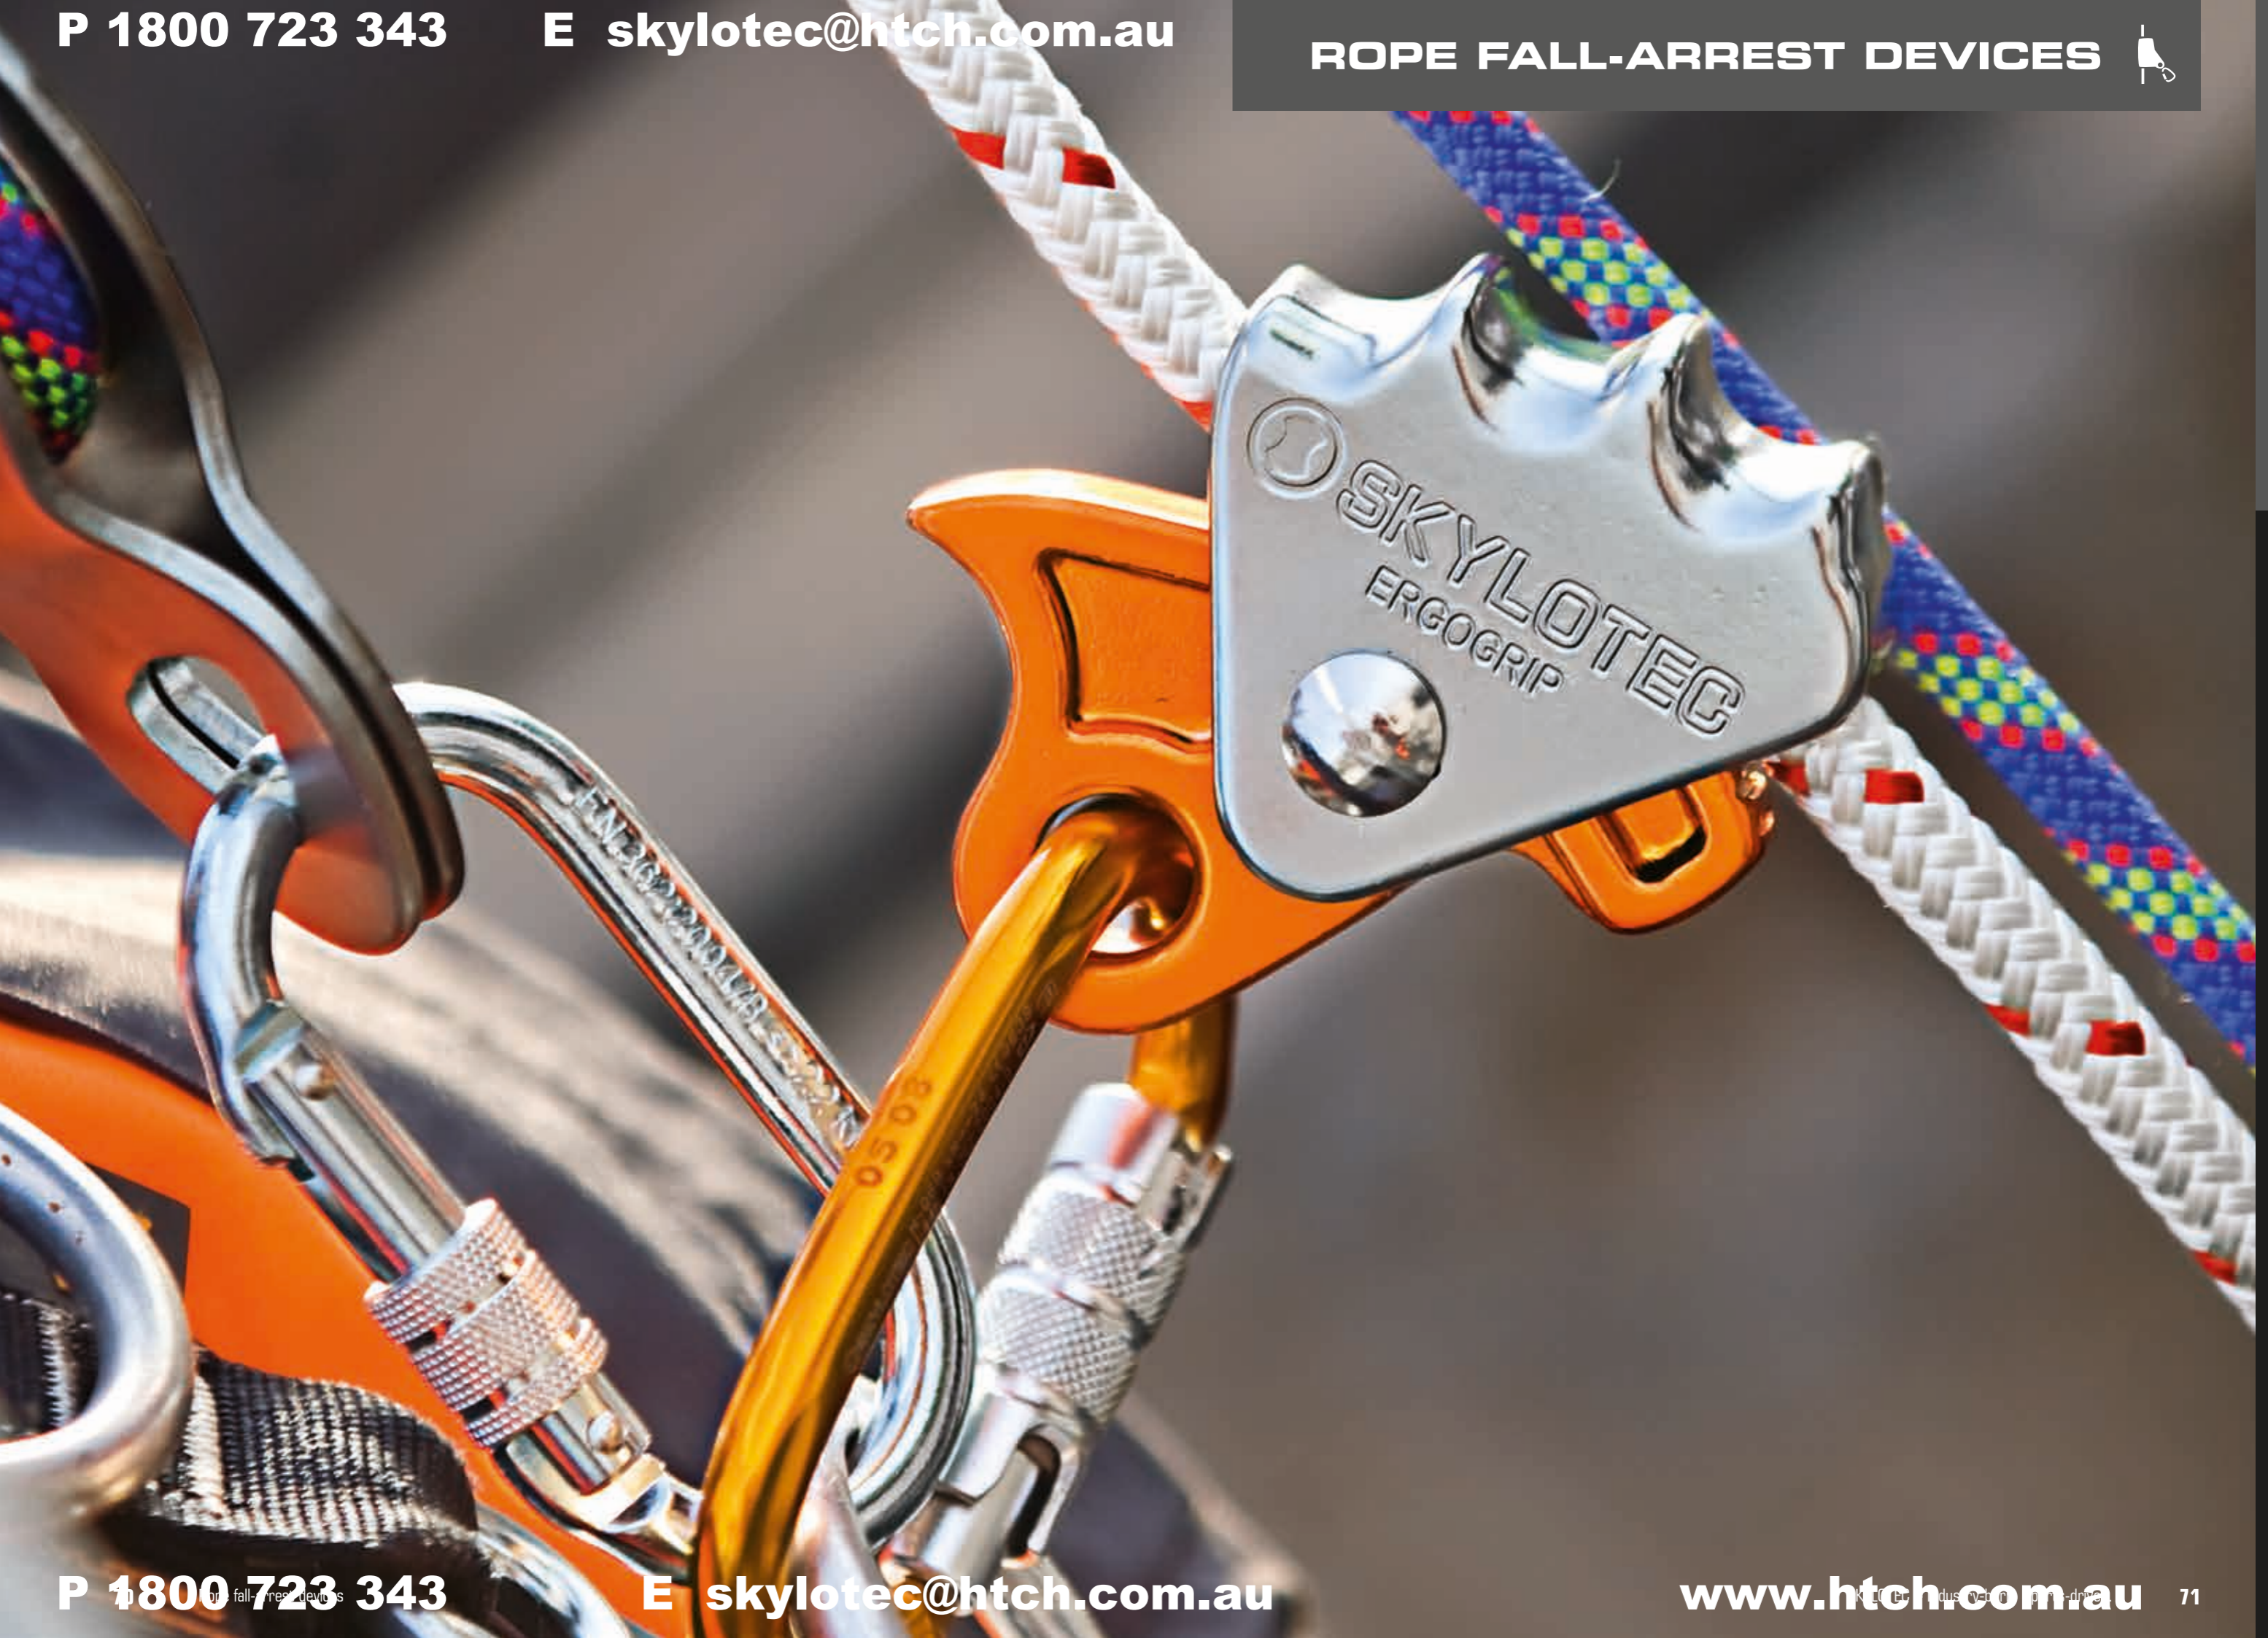

MAGIC

INFORMATION






i

MAGIC – The patented, guided type fall arrest device on a flexible guide is made of steel and aluminium and extremely light. The energy absorption results in a significantly reduced impact force when sliding on a kernmantle rope. Once the MAGIC tilts, the brake shoe wraps the rope and stops in an extremely short response time without any unpleasant tearing noise.








Rope Fall Arrest devices in this section are compliant with the AS/NZS 1891.3 standard as TYPE 1 Fall Arrest devices










 **MAGIC**

				
	EN 353-2		12 mm	
mat	AL/VA	T	KM	
	STAK		STAK	
	5 m	10 m	15 m	20 m 25 m
	1 kg	1,45 kg	1,9 kg	2,4 kg 2,85 kg
L-0200-5	L-0200-10	L-0200-15	L-0200-20	L-0200-25








 **ERGOGRIP SK 12 - FS 51/90 ST**

				
	EN 353-2, EN 358			
mat	PA, AL, St VZ	T	KM	 12 mm
	FS 51		FS 90 St	
	5 m	10 m	15 m	20 m
	1,5 kg	2,0 kg	2,4 kg	2,9 kg
L-0448-5	L-0448-10	L-0448-15	L-0448-20	

 **SKN BAND SK 11**

				
	EN 353-2		5 m -25 m	
	1,19 - 3,93 kg	T	KM	
	11 mm	mat	PA, St VZ, VA	
	FS 51		FS 51	
L-0043-5	L-0043-10	L-0043-15	L-0043-20	L-0043-25

 **ERGOGRIP SK 12 ROOF WORKER**

				
	EN 353-2	 m	5 m -25 m	
	1,19 - 3,93 kg	T	KM	
	12 mm	mat	PA, St VZ, VA	
	FS 51		FS 51	
L-0032-15			L-0032-30	


 **SK 12 KOBRA TRI/E**

12 mm rope approved for use with fall arrest devices such as the SKA device.







<div>S</div> EN 353-2					
<div>mat</div> PA		<div>T</div> KM			
<div>Q</div> KOBRA TRI					
<div>Ø</div> 12 mm					
<div>h</div> m	5 m	10 m	15 m	20 m	25 m
<div>W</div> kg	0,8 kg	1,2 kg	1,7 kg	2,1 kg	2,6 kg
	L-0084-5	L-0084-10	L-0084-15	L-0084-20	L-0084-25








 **SK 12 KOBRA TRI/RP4**







Non-removable stainless steel Type 1 fall arrest device for use on 11mm ropes.


	EN 353-2				
mat	PA	T	KM		
	KOBRA TRI		OVALSTEEL TW		
	12 mm				
	5 m	10 m	15 m	20 m	40 m
	1,5 kg	1,9 kg	2,4 kg	2,8 kg	4,7 kg
	L-0436-5	L-0436-10	L-0436-15	L-0436-20	L-0436-40

 **SKA TWIST**

				
<p>Removable stainless steel Type 1 fall arrest device for use on 12mm ropes. A dual redundant closing mechanism prevents the SKA device from being put on the rope incorrectly.</p>				
				
	EN 353-2		HMS Alu Twist	
	0,8 kg	mat	VA	
L-0058-TW				

 **SK 4**

				
Removable rope adjuster/grab device galvanised steel c/w screw gate Carabiner for use on 12mm Kernmantle rope.				
	EN 353-2		OVALSTEEL S	
	Ø 12 mm			
	0,7 kg	mat	St VZ	
L-0419				

 **SK 4 ROP**

				
	EN 353-2	mat		
T	KM		OVALSTEEL SC	
	12 mm		OVALSTEEL SC	
	10 m	15 m	20 m	25 m
	1,1 kg	1,6 kg	2,0 kg	2,5 kg
L-0289-10	L-0289-15	L-0289-20	L-0289-25	



ROPE STORAGE AND CARE

INFORMATION

i

Ropes are the principal element in the safety chain. SKYLOTEC has, therefore, placed significant importance on the development, innovation and quality of rope manufacture. All our ropes not only meet the current requirements of EN standards, but also combine technical know-how with perfect handling.

Design
SKYLOTEC rope design is core-sheathed. Ropes based on this construction function via two fundamental components - the sheath and the core. While the core primarily carries the load, the sheath protects the rope from external elements such as dirt, friction, UV rays and moisture. In the event that the sheath is damaged, exposing the core, immediately replace the rope.

The rope core is made of high-quality material, which is wound or woven into intricate strands. The rope thus has excellent flexibility, as well as enormous strength and energy absorption capacity. These characteristics are extremely important for use in fall protection systems, rescue operations and abseiling equipment.

Stranded cores also allow for highly stable rope end finishing, since the rope is not pressed or knotted as per conventional practice, but rather sewed by means of innovative sewing techniques.

Rope types
Primarily two categories of ropes are available: static ropes and dynamic ropes.

Static ropes are core-sheathed ropes with low extension.

Dynamic ropes are divided into three different types. While single ropes can be used in all applications to complete the safety chain and absorb the fall of a person, half-ropes may only be used in pairs for this purpose and twin ropes only in pairs and parallel. Dynamic ropes have a very high energy absorption capacity and thus reduce the arresting force.



Coated core rope, double plaited.



Coated core rope with twisted structure.



Twisted rope, 4-shaft



The following is recommended for correct storage:

- storage temperature approx. 20°C,
- relative air humidity max. 65 %,
- no direct sunlight,
- no aggressive chemical substances in the vicinity of the rope.

The rope is best laid loose and dry in a rope bag, protected against soiling and sunlight. If there is light soiling, it is enough to rinse the rope with clear water. In the event of more severe soiling, the rope should be cleaned in mild soapsuds; it is preferable to use distilled water, because extremely hard water leads to the formation of chalk crystals inside the rope upon drying. Allow washed ropes to dry slowly in the shade, not in the sun and not near heaters.

Coiling
It is essential that the rope is coiled up properly for transportation. If this is not done, twists can arise along the longitudinal axis of the rope, which become kinks in further use.

Coiling up the rope using the loop technique has proved to be a particularly good method, as no twists form when the rope is gathered together and the rope can also be paid out from the open coil without any twists.

Testing Mountain Ropes
Highest standards and stringent testing in accordance with UIAA standards (Union Internationale des Associations d'Alpinisme). In addition to the tests in accordance with EN 892 or EN 1891, mountain ropes are also tested in accordance with stringent UIAA standards.

Shifting of the Outer Sheath
... states the shifting of the Outer Sheath in relation to the core of the rope, if a 2 m long piece of rope is pulled 5 x through a standardised test device. The permitted limit is ± 40 mm, the UIAA standard is ± 20 mm!

Expansion in Use
... is the stretching of a piece of rope under a load of 80 kg.

Arresting Force
... designates the force acting upon the human body in fall conditions.

Knottability
... is a relative measure for the flexibility of a rope. Low values describe ropes with high flexibility.

Fall Count
... designates the number of normal falls withstood during dynamic fall testing (laboratory results). It is generally the case that the safety reserves increase with a rising number of falls.

A LITTLE FIBRE SCIENCE







	Polyamid	Polyester	Polypropylen	Polyethylen	Hanf
Specific weight	1,15	1,38	0,91	0,95	1,43
Relative wet strength (%)	85-90	100	100	100	110
Moisture absorption (%)	3,5-4,0	0,5	0,0	0,0	10,0
Melting point (°Celsius)	200-210	250	150-170	120-130	-
Flammability	low	low	medium	medium	medium
Weather resistance	good	very good	very good	good	medium
Light resistance	good	very good	good	medium	low
Acid resistance	low	good	very good	very good	low
Alkali resistance	good	low	very good	very good	low
Solvent resistance	good	very good	differing	differing	medium
Expansion (approximate value in %)	15-20	10-15	15-20	15-30	2-4

INFORMATION

i

The static rope **SUPER STATIC** is designed for heavy loads when working at heights as well as for rescue and winch operations. Expansion and sheath slip are low. The abrasion resistance of the sheath, on the other hand, is so high that it is even suitable for climbing clamps. At the same time, the SUPER STATIC is also flexible enough to be used for rescue operations with long abseiling distances. SUPER STATIC 9.0 is the only static rope with a diameter of only 9.0 mm that satisfies the EN 1891 Form A requirements and thus is approved for use in abseil and rescue devices. This enables a significantly smaller pack mass and weight for all the rescue equipment. Stocked in 100 mt lengths (in bags) & 200 mt lengths (on reels)



 EN 892, Single rope			
 78 g/m		11 mm	
mat PA	kN	30 kN	
 10		3%	
col			
R-079-WE	R-079-RO	R-079-SW	R-079-BL

X-TREM is the low-kink dynamic rope for extreme applications. It is extremely abrasion resistant, naturally suitable for sharp edges, and has very low sheath slip. That means it can be used for many abseiling operations and has a high durability.



 EN 1891, Form A			
 37%		5,7/30%	
 83 g/m		11 mm	
mat PA	kN	9 kN	
 15			
R-052-60			

 PRUSIK CORD (100 M ON A ROLL)



 EN 564	mat PA							
 0,34 kg	0,65 kg	1,2 kg	1,2 kg	1,5 kg	1,5 kg	2,7 kg	3,6 kg	3,6 kg
 2 mm	3 mm	4 mm	4 mm	5 mm	5 mm	6 mm	7 mm	7 mm
kN 0,8 kN	1,8 kN	4,1 kN	4,1 kN	6,5 kN	6,5 kN	9,9 kN	14,5 kN	14,5 kN
col								
R-115-100-S	R-116-100-O	R-107-100-S	R-107-100-RO	R-108-100-O	R-108-100-BL	R-109-100-S	R-110-100-O	R-110-100-RO



LORY

INFORMATION

Its various application areas make the **LORY PRO** your reliable companion for rope access and rescue (abseiling up to 225 kg load). In industrial climbing, **LORY WP** is used for work positioning, as a restraining device at roofs or slab edges, as a temporary anchor or for fall arrest in AS/NZS 1891.3 Type 1 vertical rope systems.


LORY PRO

LORY WP AND LORY PRO SET



		EN 341-A, EN 353-2, EN 358, EN 795-B, EN 12841-C, ANSI Z359.4
mat	Al	Ø 10 - 12 mm
	365 g	
A-041		

		EN 341-A, EN 353-2, EN 358, EN 795-B, EN 12841-C, ANSI Z359.4
mat	AL, PA, ST	Ø 10 - 12 mm
see further details and article numbers in tables on the following page		

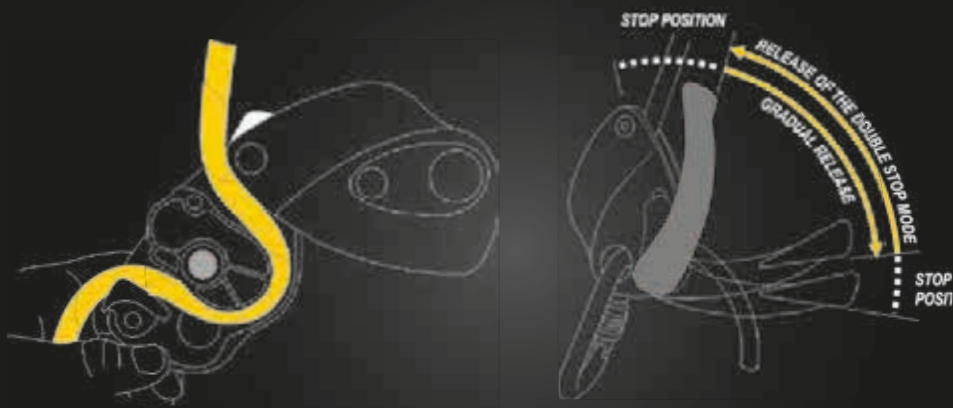

- I

OVALOY TRI

DOUBLE TRI
- II

DOUBLE TWIST

FS 51 ALU

FS 64 ALU

ATTACK

KOBRA TRI

Art. Nr. / Art. No.	A-041			
Standards		Details	Rope type	Diameter
EN 341-A	x	max./min. rated load: 30 - 180 kg; max. descent height: 190 m	Tec-static pro / Static R44	11 mm
EN 12841-C	x	max. rated load: 225 kg	Static rope	10 - 12 mm
EN 358	x		Static R44	10,5 / 11 mm
EN 795-B	x		Static R44	10,5 / 11 mm
ANSI/ASSE Z359.4	x			

LORY WP / LORY PRO SET (with rope)						Rope replacement (for LORY PRO)	
Standard	Art. No. Version		Equipment			Art. No. Version	Equipment
	LORY WP	LORY PRO SET					
EN 358	L-0684-1,5	L-0690-1,5	I	II	Länge/Length	L-0696-1,5	stitched end / FS 51 ALU / 1,5 m
	L-0683-1,5	L-0689-1,5	OVALOY TRI	FS 51 ALU	1,5 m	L-0695-1,5	stitched end / FS 64 ALU / 1,5 m
	L-0682-1,5	L-0688-1,5	OVALOY TRI	FS 64 ALU	1,5 m	L-0694-1,5	stitched end / ATTACK / 1,5 m
	L-0681-1,5	L-0687-1,5	OVALOY TRI	ATTACK	1,5 m	L-0693-1,5	stitched end / KOBRA TRI / 1,5 m
	L-0680-2	L-0685-2	OVALOY TRI	KOBRA TRI	1,5 m	L-0691-2	stitched end / KOBRA TRI / 1,5 m
		L-0685-2	OVALOY TRI	Auge (Eyelet)	2,0 m		
		L-0697-2	DOUBLE TRI	DOUBLE TWIST	2,0 m		
		L-0699-1,5	DOUBLE TRI	ATTACK	1,5 m		
		L-0699-2	DOUBLE TRI	ATTACK	2,0 m		



 MARK 1 PLUS





 ROPE GRAP ROCKER

 CHEST

 MARK 8

 MARK 8 RESCUE





	
S EN 12841	
 118 mm x 79 mm x 30 mm	
 15 mm	 8-13 mm
mat AL	 142 g
H-058	



 HOIST FIX











	
S EN 12841	
 104 mm x 75 mm x 30 mm	
 14 mm	 8-13 mm
mat AL	 140 g
H-063	

			
§	-		
	0,13 kg		2 m/s
mat	AL	m	-
	1		
A-008			

			
§	-		
	0,25 kg		2 m/s
mat	AL	m	-
	1		
A-009			

with panic feature, for 11 mm static rope
Rated to 200kg & suitable for two person rescue.

			
S EN 341-A, EN 12841-C			
			
0,428 kg		$\frac{m}{s}$	2 m/s
mat AL			
m		200 m	
			
1			
A-031			

			
S EN 353-2, EN 358, EN 12841			
	110 x 65 mm		
	10,5-13 mm		170 g
mat AL			
H-060			




RIGGING PLATE MINI



91 mm x 84 mm x 5 mm
20 mm -
35 kN 70 g
mat AL
H-085

RIGGING PLATE MAXI

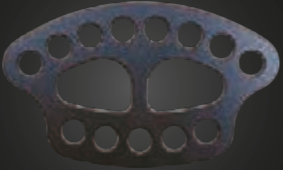

249 mm x 150 mm x 9 mm
20 mm -
45 kN 442 g
mat AL
H-086

RIGGING PLATE MIDI



166 mm x 108 mm x 9 mm
20 mm -
40 kN 224 g
mat AL
H-089

ROPEGUARD



mat PES col
90 g
-
-400mm x 140mm
ACS-0039

LIFT FIX L



LIFT FIX R



LOOP ASCENDER



S -
1,20 m
25 mm 100 g
mat PA
L-0193-1,2

WIB



S EN 354	
110 mm x 50 mm	
35 mm -	
40 kN 156 g	
mat AL	
H-074	

ROPE BAG



mat PA col
460 g
37 l
400 x 250 x 250 mm
ACS-0112

Ascenders (left & right handed) suitable for use on 8mm to 13mm ropes

S EN 12841
203 mm x 90 mm x 28 mm
15 mm 8-13 mm
- 216 g
mat AL
H-064-L

Ascenders (left & right handed) suitable for use on 8mm to 13mm ropes

S EN 12841	
203 mm x 90 mm x 28 mm	
15 mm 8-13 mm	
- 216 g	
mat AL	
H-064-R	



INFORMATION

i

SKYLOTEC carabiners are fitted with the **KEYLOCK SYSTEM** for improved handling. For increased safety, the interface between carabiner body and snapper no longer has any hooks and, therefore, cannot get caught in the anchor point, rope or webbing.



SCREWLOCK
SYSTEM



TWISTLOCK
SYSTEM



TRILOCK
SYSTEM



PINCHLOCK
SYSTEM



DOUBLE
TWISTLOCK
SYSTEM



DOUBLE
TRILOCK
SYSTEM



The various fastening systems at a glance

DOUBLE

INFORMATION

i

UNIQUE, patented **DOUBLE** Carabiner range features a two way opening mechanism which means left handed & right handed users can open the Carabiner with ease.



 DOUBLE TRI

 NEW!




S EN362, EN12275, UIAA 121	
L 112 mm x 76 mm	
 9 kN	 7 kN
 22 kN	
mat AL	 91 g
H-173-TRI	

 DOUBLE TWIST

 NEW!



S EN362, EN12275, UIAA 121	
L 112 mm x 76 mm	
 9 kN	 7 kN
 22 kN	
mat AL	 90 g
H-173-TW	

SAFELOCK SC AND PINCHLOCK II

INFORMATION

i

Cracking a safe would be easier!
The **SAFELOCK SC** carabiner offers outstanding safety when in use in industrial, rope access or sports climbing. This carabiner has a screwgate and an additional bar, that not only prevents unintentional opening, it also prevents twisting when belaying. No matter what your work application is, with the **SAFELOCK SC**, you're in safe hands. The handling of the **PINCHLOCK II** is extremely simple and allows rapid opening and closing of the karabiner even in tricky situations **PINCHLOCK II** features a unique triple (squeeze & press) action.

 PINCHLOCK II





S EN 12275:1998, EN 362-B:2004, UIAA 121	
L 112 mm x 78 mm	
 9 kN	 22 kN
 7 kN	 29 mm
mat AL	 80 g
H-163-PL-AN	H-163-PL-OR

 SAFELOCK SC






S EN 12275:1998, EN 362-B:2004, UIAA 121	
L 112 mm x 78 mm	
 9 kN	 22 kN
 7 kN	 29 mm
mat AL	 80 g
H-175-PK	

PASSO

 PASSO-SC





S EN 12275, EN 362, UIAA 121	
L 112 mm x 78 mm	
 10 kN	 22 kN
 7 kN	 30 mm
mat AL	 75 g
H-137-SC-GR	H-137-SC-OR

 PASSO-TWIST





S EN 12275, EN 362, UIAA 121	
L 112 mm x 78 mm	
 10 kN	 22 kN
 7 kN	 30 mm
mat AL	 82 g
H-137-TW	

 PASSO-TRI






S EN 12275, EN 362, UIAA 121	
L 112 mm x 78 mm	
 10 kN	 22 kN
 7 kN	 30 mm
mat AL	 85 g
H-137-TRI	

 OVAL SCREW

 NEW!



S EN362, EN12275, UIAA 121	
L 109 mm x 58 mm x 12,7 mm	
 9 kN	 7 kN
 24 kN	
mat AL	 80 g
H-176-SC	H-176-SC-SW

 DOUBLE-O TRI

 NEW!



S EN362, EN12275, UIAA 121	
L 109 mm x 58 mm x 12,7 mm	
 9 kN	 7 kN
 24 kN	
mat AL	 85 g
H-176-TRI	

 DOUBLE-O TWIST

 NEW!



S EN362, EN12275, UIAA 121	
L 109 mm x 58 mm x 12,7 mm	
 9 kN	 7 kN
 24 kN	
mat AL	 85 g
H-176-TW	



CARABINERS
AND HARDWARE

VIPER

VIPER ALU SC	VIPER ALU TW	VIPER ALU TRI
<div><div>EN 362</div><div>125 mm x 90 mm</div><div><div>7 kN</div><div>30 kN</div></div><div><div>-</div><div>24 mm</div></div><div><div>mat AL</div><div>120 g</div></div><div>H-115</div></div>	<div><div>EN 362</div><div>125 mm x 90 mm</div><div><div>7 kN</div><div>30 kN</div></div><div><div>-</div><div>24 mm</div></div><div><div>mat AL</div><div>120 g</div></div><div>H-102</div></div>	<div><div>EN 362-B:2004</div><div>125 mm x 90 mm</div><div><div>7 kN</div><div>30 kN</div></div><div><div>-</div><div>24 mm</div></div><div><div>mat AL</div><div>122 g</div></div><div>H-088</div></div>

OVALOY TW	OVALOY TRI
<div><div>EN 362</div><div>108 mm x 58 mm</div><div><div>7 kN</div><div>22 kN</div></div><div><div>-</div><div>18 mm</div></div><div><div>mat AL</div><div>82 g</div></div><div>H-036</div></div>	<div><div>EN 362</div><div>110 mm x 60 mm</div><div><div>7 kN</div><div>24 kN</div></div><div><div>-</div><div>21 mm</div></div><div><div>mat AL</div><div>82 g</div></div><div>H-069</div></div>

VIPER STEEL SC



EN 362, ANSI Z359.1-2007

125 mm x 93 mm

16 kN 50 kN

27 mm

mat St 276 g

H-026

VIPER STEEL TW



EN 362, ANSI Z359.1-2007

123 mm x 90 mm

16 kN 45 kN

25 mm

mat St VZ 360 g

H-002

STEEL D TRI



EN 362, ANSI Z359.12-2009,
CSA Z259.12-Cl.1:2011

110 mm x 67 mm

16 kN 41 kN

20 mm

mat St VZ 252 g

H-132

KOBRA TW



EN 362, ANSI Z359.12-2009,
CSA Z259.12-01

130 mm x 73 mm

16 kN 45 kN

22 mm 22 mm

mat St VZ 280 g

H-103

KOBRA TRI



EN 362, ANSI Z359.12,
CSA Z259.12-01

133 mm x 73 mm

16 kN 45 kN

22 mm 22 mm

mat St VZ 270 g

H-121

OVALSTEEL SC



EN 362-B:2004

108 mm x 58,5 mm

7 kN 22 kN

17 mm

mat St VZ 164 g

H-037

OVALSTEEL TW



EN 362-B:2004

110 mm x 60 mm

7 kN 22 kN

18 mm

mat St VZ 192 g

H-038

OVALSTEEL TRI



EN 362-B:2004

111 mm x 62 mm

15 kN 30 kN

10 kN 21 mm

mat St VZ 190 g

H-051

FS 90 ANSI



EN 362, ANSI Z359.12,
CSA Z259.12

236 mm x 125 mm

EH -

16 kN 50 kN

25 mm 60 mm

mat St VZ 810 g

H-042

FS 90 ALU



EN 362

238 mm x 117 mm

EH -

16 kN 20 kN

29 mm 60 mm

mat AL 476 g

H-015

FS 90 ST



EN 362

219 mm x 101 mm

EH -

16 kN 23 kN

20 mm 59 mm

mat St VZ 480 g

H-016

 FS 64 ALU



 EN 362, ANSI Z359.12-2009, CSA Z259.12-01	
 254 mm x 138 mm	
 16 kN	 28 kN
 30 mm	 64 mm
mat AL, St VZ	 690 g
col  	
H-157-GR	H-157-OR


 FS 110 ALU



 EN 362	
 358 mm x 170 mm	
 25 kN	
 -	
 27 mm	 110 mm
mat AL	 990 g
H-081	









 DELTA LINK 8



 -	
 72 mm x 40 mm	
 SC	
 10 kN	 38 kN
 -	 10 mm
mat VA	 88 g
H-047-8-VA	







 OVAL LINK 10



 EN 362	
 89 mm x 47 mm	
 SC	
 10 kN	 31 kN
 -	 12 mm
mat VA	 142 g
H-048-10-VA	



 OVAL LINK 8 VA




 EN 362	
 74 mm x 39 mm	
 SC	
 10 kN	 26 kN
 -	 10 mm
mat VA	 79 g
H-048-8-VA	








 FS 92

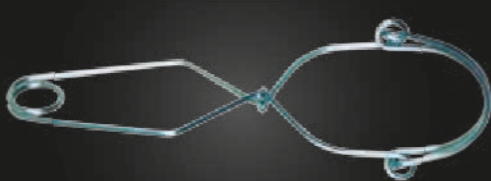

 EN 362	
 330 mm x 152 mm	
 23 kN	
 -	
 24 mm	 85 mm
mat ST VZ	 868 g
H-017	






 CROSS LINK



 EN 362	
 442 mm x 190 mm	
 22 kN	
 -	
 37 mm	 140 mm
mat VA	 380 g
H-045-140	

 D-LINK



 EN 362, EN 12275	
 87 x 67 mm	
 SC	
 10 kN	 45 kN
 -	 11 mm
mat St VZ	 152 g
H-046-10-VZ	





INFORMATION

i

Rope pulleys are essential for routine operations involving the rescue and transportation of persons. Rope friction is reduced and the transported load is moved more easily by means of pulley blocks.

SKYLOTEC rope pulleys are fitted with ball bearings and are made of aluminium. All pulleys comply with EN 12278 and UIAA 127 and are manufactured in the EEC. High quality is also reflected in their design. The mould design ensures minimal material use and lightweight design of the rope pulley.

CARABINERS AND HARDWARE

STANDARD ROLL	INLINE ROLL 2L	MINI ROLL CAGE
123 mm x 70 mm x 70 mm	152 mm x 70 mm x 70 mm	74 mm x 44 mm x 44 mm
27 mm 32 kN	27 mm 50 kN	17 mm 22 kN
2 kN mat AL	2 kN mat AL	2 kN mat AL
236 g max 13 mm	354 g max 13 mm	114 g max 13 mm
H-067	H-068	H-070

STANDARD ROLL 2L	INLINE ROLL	MINI ROLL CAGE
147 mm x 70 mm x 70 mm	80 mm x 114 mm x 32 mm	82 mm x 45 mm x 30 mm
27 mm 32 kN	24 mm 25 kN	16 mm 22 kN
2 kN mat AL	2 kN mat AL	2 kN mat AL
212 g max 13 mm	280 g max 13 mm	90 g max 13 mm
H-072	H-093	H-099



DEUS

INFORMATION



SKYLOTEC expands its programme of devices with centrifugal brake systems and complements its line with fully automatic **DEUS** rescue devices.

Personal Escape, Assisted Rescue, Multiple Evacuations

When things go wrong 100 mt in the air, the **SKYLOTEC DEUS 3300** provides a quick, simple way to get yourself or another person down safely.

Pocket sized so you can carry it with you, the DEUS 3300 is easy to use – just anchor and go. Descent is HANDS FREE or managed via a precise control dial with Stop-Go-Speed function, even with heavy gloves.

Because the DEUS 3300 operates in both directions, multiple people can descend sequentially without re-rigging. Plus, ropes can be replaced easily so you can use different ropes for different tasks.


DEUS 3300



DEVICE FOR FIRE FIGHTERS & SPECIAL FORCES

NFPA 1983 (12ED) "Fire Escape"
max. 140 kg
3 m/Sek. 0,97 kg
13,5 x 9 x 6 cm mat AL/SST/T
A-330

DEUS 3700



DEUS 3700 & 7300 are certified with NFPA 1983 (12ED) „Escape‘ ropes. 100 % Technora 7.5 mm diameter. Poly Technora 7.5 mm or 8.0 mm. DEUS 7300 is available with 12.0 mm Kevlar or Nylon Static ropes.



SELF-RESCUE, ASSISTED RESCUE, MULTI-PERSON EVACUATIONS.

Whether you work on 3 mt high platforms or 150 mt towers, the SKYLOTEC DEUS 3700 is a safe, easy-to-use and reliable tool for escape, self-rescue, assisted rescue, and more. It works in both directions so multiple people can descend one after another, and ropes can be replaced so it is cost effective and versatile. The DEUS 3700 features quadruple redundant braking, automatic speed limiting technology, hands-free descent, and a precise speed control dial. Therefore, it is built for a variety of rescue applications at heights up to 180 mt, including individual escape, rapid sequential evacuations and assisted rescue.

EN 341 and CSA Z259.2.3 (both Type 1, Class B); ANSI Z359.4
EN, CSA: max. 125kg; ANSI: max. 140 kg
2 m/Sek. 1,3 kg
13,5 x 10 x 6 cm mat AL/SST/T
A-370

DEUS 7300



DECENT DEVICE FOR HIGH-ROPE COURSES AND FOR BACK-UP

The heavy duty SKYLOTEC DEUS 7300 provides a persistent and solid foundation for a no-compromise back-up belay solution that ensures reliable safety, making it also a perfect abseil belay at the end of high-rope or zip-line courses.

EN 341 and CSA Z259.2.3 (both Type 1, Class A); ANSI Z359.4; NFPA „G“
EN: 150 kg; CSA: 125 kg; ANSI, NFPA: 140 kg
0,5 to 2 m/Sek. 6,9 kg
20 x 24 x 7,5 cm mat AL/SST
A-370

EPIC

INFORMATION



100% security in lead climbing with **EPIC - Electronic Partner for Individual Climbing**.

With the EPIC, advanced electronics enter the world of fall arresters. The first automatic rope management system that allows climbing without belay partners. The device is portable and easy to attach to Construction Cranes, walls or poles. The device is remote controlled. The user can trigger the brake, retract the rope or descend by pressing a button. The EPIC registers a fall immediately and locks the rope. The EPIC can be used with the SKYLOTEC SKYSAFE PRO & BFD Lanyards.

WALL BRACKET



- mat AL
- -
- 1 kg
225 x 108 x 30 mm
A-032-W

DESCENDERS & RESCUE DEVICES

EPIC



EN 1496, EN 364, EN 13849, EN 341
70 m 0,5 m/s
9 – 12 mm STATIC 1
170 x 250 x 160 mm 9 kg
mat AL, ST VZ
A-032

EPIC REMOTE



- mat K
- -
- 100 g
25 x 55 x 80 mm
A-032-R

TOWER BRACKET



- mat VA
- -
- 4,3 kg
320 x 100 x 100 mm
A-032-M

MILAN

INFORMATION

i











For more than decade, **MILAN** has served as standard rescue equipment in many areas. The reinforced brake is controlled centrifugally; it keeps the speed constant during the entire descent and permits a quick and safe rescue. The brake shaft is mounted on ball bearings on both sides. The housing is constructed of milled aircraft grade aluminium which makes MILAN 2.0 the most robust equipment in the world. This is what allows rescue techniques such as rescue support in lattice mast structures. A seal reveals whether the MILAN 2.0 has been opened without authorisation. The MILAN 2.0 is certified under international standards and special regulations to be used on vessels and offshore structures, e.g. by Germanischer Lloyd.

NOTE: All models of the MILAN device are available in rope lengths up to 500 mt.







 MILAN 2.0



			
	EN 341, ANSI Z359.4		
	500 m		0,9 m/s
	SUPER STATIC 9 mm		2
	KOBRA TW		2,3 kg
	AL, ST VZ, PA		
			

 MILAN 2.0 HUB



			
			
S EN 341, EN 1496, ANSI Z359.4			
m	500 m	m/s	0,9 m/s
T	SUPER STATIC 9 mm		2
Q	KOBRA TW		3,1 kg
mat	AL, ST VZ, PA		
A-028			

INFORMATION

i

Milan 2.0 is the basic EVACUATION model. Simply attach the Carabiner at the rope end to the harness attachment. Step off the structure & it will control descend at 0.9mt per second. As the first person reaches the ground the trailing rope end (fitted with a Carabiner) allows the next person to descend in the same manner.

MILAN 2.0 HUB is equipped with a lifting function. Therefore, it is possible to lift a casualty first over a short distance to release the fasteners and then lower the person safely; the new housing design improves handling during accompanied rescue. The SUPERSTATIC 9.0 continues to meet this requirement with only 9 mm in diameter. Compared to devices with 10.5 mm ropes, the pack size remains small when using the MILAN 2.0 HUB. This is a big advantage especially at great heights.



 MILAN 2.0
EVACUATION KITS



 MILAN 2.0 HUB RESCUE & EVACUATION
KITS



NOTE: MILAN Kits are available in other component options and rope lengths up to 500 mt.

T	SUPER STATIC 9 mm		
m	20 m	40 m	60 m
👤	4,4 kg	5,7 kg	6,8 kg
SET-236-20		SET-236-40	SET-236-60

T	SUPER STATIC 9 mm		
m	20 m	40 m	60 m
👤	4,4 kg	5,7 kg	6,8 kg
SET-238-20		SET-238-40	SET-238-60


 HEAVY DUTY DRILL KIT
TO MILAN 2.0 POWER



 DRILL KIT COMPONENTS
- BATTERY PACK X 2



 DRILL KIT COMPONENT
CHARGING UNIT

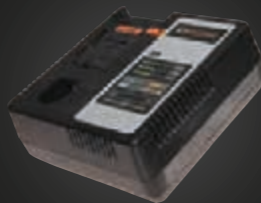

NOTE: These components are supplied in a convenient PVC carry case under the one part number - A-029-G

👤	1,6 kg
A-029-G	

👤	0,8 kg
A-029-A	

👤	1 kg
A-029-L	

MILAN POWER

INFORMATION



The **MILAN 2.0 POWER** is a special version of the MILAN 2.0 HUB, that additionally can be powered electrically.

- Offgrid thanks to lithium-ion rechargeable batteries
- Max. rappelling weight 250 kg
- Distances to 60 m at 100 kg with 1 battery charge
- Changing batteries on the hanging rope is easily possible
- If there is a device fault or low battery charge, emergency operation is ensured through the hand wheel.


Note: The MILAN 2.0 POWER may only be used with the devices that are also provided by SKYLOTEC! The modified, rechargeable battery device, specially developed for MILAN 2.0 Power can be easily and quickly adapted and enables faster rappelling up of an accident victim over longer distances or rappelling yourself up.

The following components can be purchased seperately to complement the MILAN 2.0 POWER

- Heavy duty drill is the drive for the MILAN 2.0 POWER
- 2x lithium-ion rechargeable battery
- Charger
- Convenient carry case
- The above items make up the accessory kit to the Milan Power.
- Article number A-029-G

 MILAN 2.0
POWER



			
S	EN 341, EN 1496, ANSI Z359.4		
m	500 m	m/s	0,9 m/s
T	SUPER STATIC 9 mm	👤	2
Q	KOBRA TW	👤	3,1 kg
mat	AL, ST VZ, PA		
A-029			



SEAL PAC



SEAL PAC





All rescue devices must be inspected on an annual basis – even unused devices stored for emergencies. With the **SEAL PAC**, this regular inspection becomes easier. The MILAN is stored in a sealed metal box. An authorised inspector opens the sealed box once a year and checks the moisture indicator on the MILAN packaging and it's perfect condition. If everything is all right, the inspector marks month and year of the next inspection, signs, and seals the metal box with a new seal. Saving costs and time with controlled safety are the essential advantage of the SEAL PAC. Operation time 10 years.



	6,6 kg	6,6 kg	8,6 kg	10 kg
	582 mm	592 mm	782 mm	902 mm
	385 mm	385 mm	385 mm	495 mm
	277 mm	409 mm	379 mm	379 mm
<div>SET-SEAL PAC-80SET-SEAL PAC-120SET-SEAL PAC-150SET-SEAL PAC-250</div>				



SEAL PAC
LIGHT TO GO

	30 cm
	95 cm
	59 l
	2,3 kg
SET-SEAL PAC-LITG-L	



SAFETY ROLL II
3:1 KITS











	DYNAMIC LONGLIFE 9 mm		
	EN 341, EN 1496		2
	OVALSTEEL 22		DYNAMIC LONGLIFE 9 mm
	40 m	60 m	65 m
	6,0 kg	6,6 kg	6,9 kg
<div>SET-241-50SET-241-60SET-241-65</div>			



SAFETY ROLL II
4:1 KITS



	DYNAMIC LONGLIFE 9 mm		
	EN 341, EN 1496		2
	OVALSTEEL 22		DYNAMIC LONGLIFE 9 mm
	40 m	60 m	65 m
	3,4 kg	4,6 kg	4,9 kg
	6,1 kg	6,4 kg	
<div>SET-239-40SET-239-60SET-239-65SET-239-85SET-239-90</div>			



SAFETY SEAT






	EN 341, EN 1496		
	150 m		
	SUPER STATIC 9 mm		2
	OVALSTEEL 22		2,6 kg
ACS-0021			



TELESKOP




Adjustable First Man Up Pole. 1.3mt to 6.25mt NOTE: Requires either of the attachment hook Teles FS 90 or FS 110) seen below

	-		
	1,3 m - 6,25 m	2 m - 8 m	2 m - 10 m
	-	-	-
	AL	AL	AL
	2214 g	2363 g	3308 g
<div>ASC-0069-6/9ASC-0069-8/4ASC-0069-10/5</div>			



TELESTICK FOR
MILAN RESCUE



Telescopic rescue Pole 83cm to 3.66mt. Ideal rescue tool for use with the Milan devices.

	-		
	380 mm - 3660 mm		
	-		-
	-		560 g
	AL		
ASC-0070			




TELES FS 90



	EN 795		
	-		
	29 mm		60 mm
	-		750 g
	AL		EH
H-015-KUP			



TELES FS 110

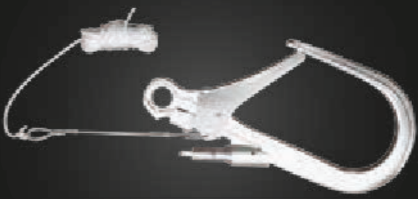

	EN 795		
	-		
	27 mm		110 mm
	-		1300 g
mat	AL		EH
H-081-KUP			





SKYRAIL

INFORMATION

i


SKYRAIL is a horizontal fall protection system, which allows people to work at great heights. The system can be used, for example, on flat roofs, stadium roofs, loading plants, wind turbines or cranes. Attached to floors, walls or ceilings, maintenance work and other activities can be carried out safely with the SKYRAIL system. A MAXIMUM of THREE users can attach themselves easily to the SKYRAIL RUN using their Personal Fall Protection Equipment (PFPE) and move freely along the rail without stopping. The high-quality, architectural appearance of the system will fulfil all your design requirements. A choice of colour scheme allows the SKYRAIL to blend in with the building.

SKYRAIL is certified according to DIN EN 795/D:2012 and CEN/TS 16415 and is compliant to AS/NZS 1891.2. The system is made from extremely robust, seawater-proof aluminium alloy and is suitable for protection against falls and as a restraint system. It is designed so that it deforms in the event of a fall and thereby cushions the impact. Accessory parts, such as curved sections, are precisely adapted to suit the system. Its high level of adaptability makes the SKYRAIL ideal for guaranteeing the highest level of safety, even for work on complex structures. The system has been constructed and tested for use with the SKYRAIL RUN runner. This runner is certified according to EN 795/D:2012 and is mounted on ball bearings so that it is subjected to minimal wear and can be attached or removed from any point in the system. It also has outstanding running properties.

The materials used are resistant to particularly aggressive conditions, such as constant or repeated immersion in seawater or in areas where there is seawater spray, chlorinated atmospheres in indoor swimming pools or in atmospheres with extreme chemical pollution.

SKYRAIL rail is available at a maximum 6mt length or customised lengths up to 6mt

SKYRAIL RUN

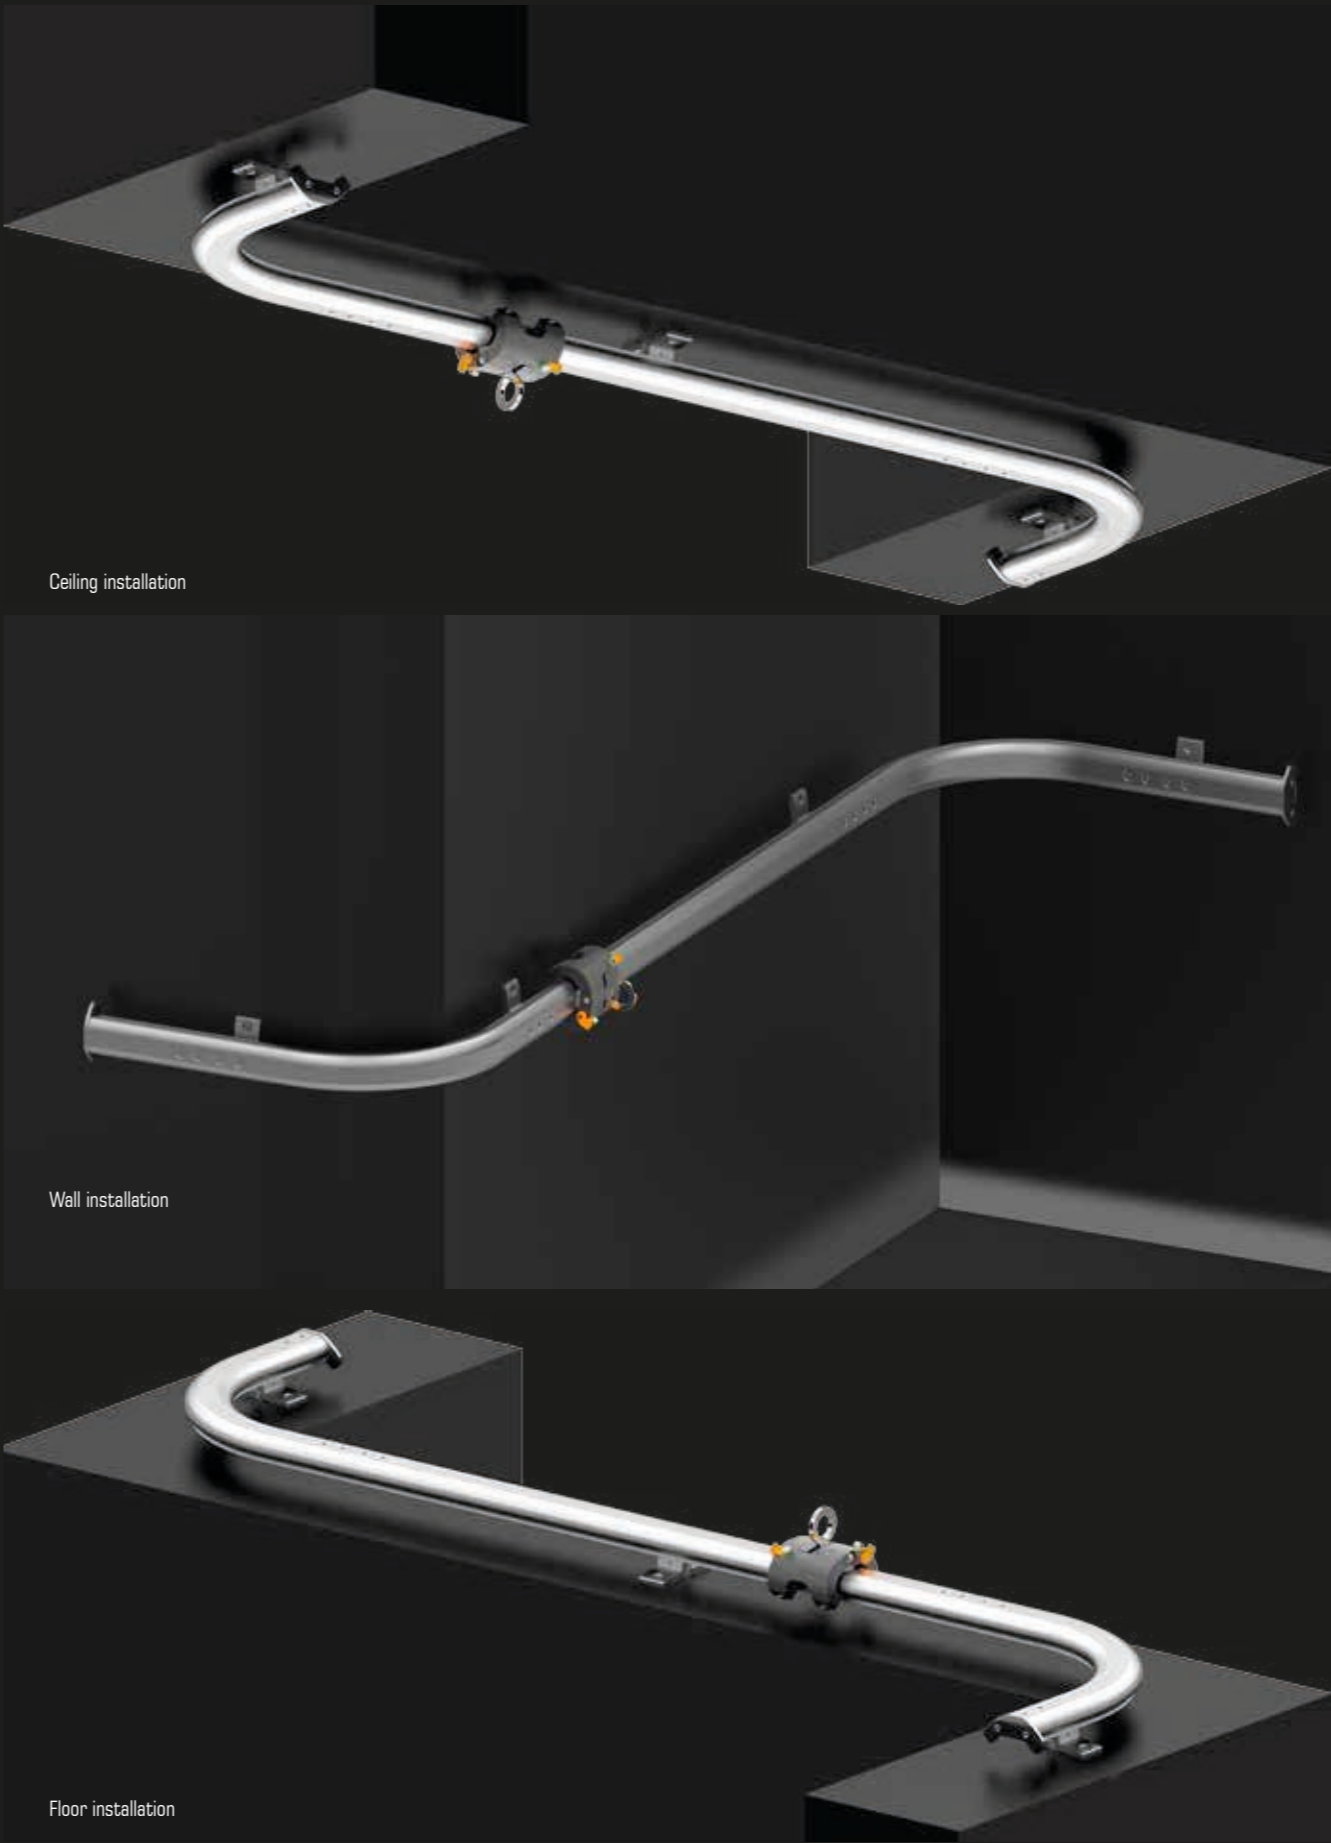

	EN 795/D
mat	St, K
	1600 g
SR-100	

SKYLINE

INFORMATION

i

The flexible **SKYLINE** system is a stainless steel rope safety system for horizontal applications.

SKYLINE RUN can be attached or removed at any point of the system. The user can freely move along the rope without having to reposition the intermediate anchor and curved parts.

- Norm:**
- SKYLINE RUN: EN795-B/C
 - SKYLINE OVERHEAD RUNNER: EN795-C

- Materials:**
- All system components made from stainless steel
 - Stainless steel 8 mm in diameter

Underground attachment:

- Attachment to different types of structure such as steel, concrete, masonry, wood, system supports, etc. using suitable fastening methods and technology (involving screws/bolts and dowels)

Positioning:

- Floor, Wall, Ceiling

Number of users:

- 2 in field
- 4 in entire system

A computer program provided by the manufacturer is used to verify the nature of the forces being exerted on the supporting structure.

SKYRAIL RUN



mat	VA		560 g
SL-100			

SKYLINE OVERHEAD DUTY RUNNER



With additional rolls for better run over intermediate rope holders for overhead use with fall-arrest devices.

mat	VA		0,576 kg
SL-101-V			


SKYLINE CABLE



Steel rope 8 mm 7x7 (6x7 plus core)

mat	VA		0,25 kg/m
SL-004			

SKYLINE INTERMEDIATE MOVE

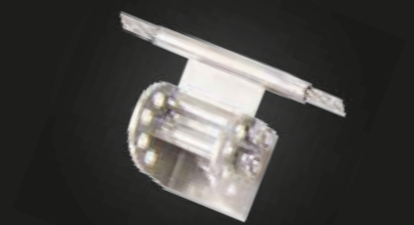

mat	VA		0,48 kg
SL-005-M			


SKYLINE 3-PART CURVE



3-pc. curve for mounting on facades, 90 or 135-degrees.

mat	VA		
	0,56 kg	0,50 kg	
SL-011-90	SL-011-135		

MULTIELEMENT SET



mat	VA		1,42 kg
SL-105			

SKYLINE INTERMEDIATE FIX



Fixed intermediate holder

mat	VA		0,24 kg
SL-005-F			

SKYLINE PLATE



mat	VA		0,34 kg
SL-009-I			

COMPENSATOR SET



mat	VA		1,75 kg
SL-106			

SKYLINE CURVE



90- or 135-degree curve

mat	VA		
	0,85 kg	0,85 kg	
	SL-006-90	SL-006-135	

SKYLINE T



T-anchor

mat	VA		0,60 kg
SL-009-T			



SKA 8

- SKA 8 RUN
- TOP BRACKET
- INTERMEDIATE BRACKET



0,93 kg

SKA8-RUN-B



5,8 kg

SKA8-TOP-SB



0,5 kg

SKA8-INT-MD

- BOTTOM BRACKET
- CABLE
- BOTTOM BRACKET



4,4 kg

SKA8-BOTTOM-SB-T



3,05 kg – 39,65 kg

SKA8-CAB-10 – SKA8-CAB-130



3,6 kg

SKA8-BOTTOM-SB

SPEED ATTACH

- INFORMATION
- SPEED ATTACH

NEW!

The new **SPEED ATTACH** is a runner of the latest generation that can be **attached** and **detached** at any point of the C-profile, but comprises two redundant retention systems as usual. Construction and double locking mechanism also prevent reversed placement or opening under load. A green indicator shows secure locking at any time. Therefore, operating errors are impossible. The runner is suitable for back-pull and drag operation. Solid aluminum housing, stainless steel axles and metal guide rollers ensure low wear. Even after a fall, the runner can still be reconditioned.



	EN 353-1
	KobraTri
mat	AL, VA, StVZ
	1,4 kg
TAC-0004	

SPEED

INFORMATION

i

To increase safety in the use of fall arrest systems, SKYLOTEC has developed **SPEED**, a patented runner with two redundant retention systems and speed-dependent fall arrest function. The principle of SPEED is simple: The catch bolt sits hidden in the housing and is protected from unwanted interference. Using an additional lever, SPEED acts like a back-pull runner while climbing. The runner remains short and therefore the fall arrest path. This ensures climbing comfort and reduces fall-related injuries. In the event of failure of the back pull, whether by fault or unfortunate circumstances, the runner can reach only a fixed pre-set maximum speed. If the runner exceeds this speed, the independently acting second safety device engages: A centrifugal brake swivels out the catch bolt and blocks the runner.



 SPEED






 EN 353-1
 KobraTri
mat AL, VA, StVZ
 1,0 kg
TAC-0002

PERMANENT
FALL PROTECTION



 CLIMBING LADDERS

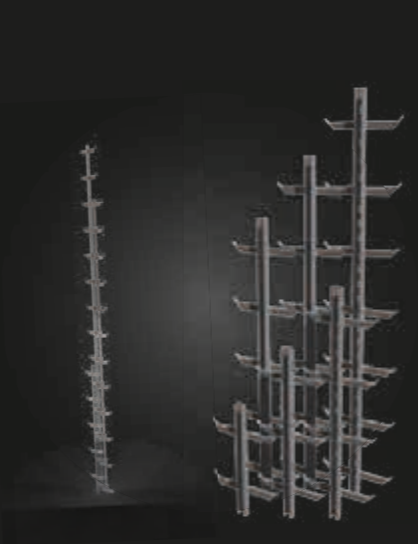

TAC-0010

 RESTING PLATFORM




TAC-0004

 EXTENSION POST



TAC-0180

 RAIL PROFILE

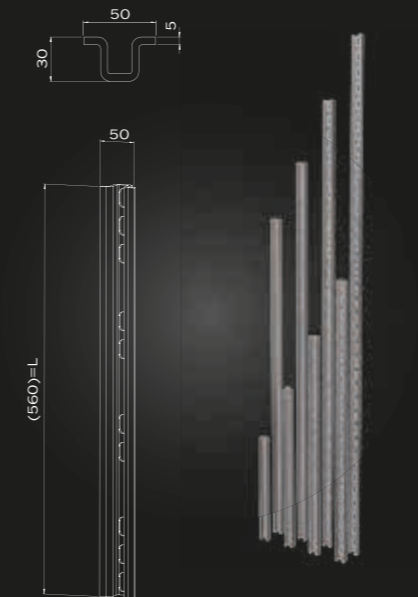

TAC-0020

 EXIT
DEVICE
5MW



TAC-0132

 SIDE RAIL
REINFORCE-
MENT



TAC-0250

 EXIT
DEVICE



TAC-0131

 MOUNTING
BRACKET



TAC-0070

INFORMATION



MOBILFIX is a removable attachment point for regularly recurring tasks, such as window cleaning. Only the **MOBILFIX TERMINAL** is permanently installed at the point of use. The MOBILFIX TERMINAL is virtually flush with the surface in the wall or the ceiling and is sealed through the interior spring plug. Thus dirt cannot penetrate and visually it is inconspicuous. For tasks the MOBILFIX is temporarily arrested in the MOBILFIX TERMINAL. The MOBILFIX is part of the personal protective equipment of the user. Thanks to the patented shape of the MOBILFIX, it prevents the carabiner of the fastener from abrading or fouling the wall.

MOBILFIX




MOBILFIX TERMINAL







EN 795-A/B, CEN/TS16415
131 mm x 50 mm x 40 mm
1
mat VA, Acrylnitril Butadien-Styrol
250 g
AP-018

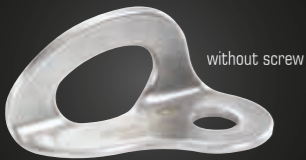Mounting sleeve to hold the MOBILFIX	
EN 795-A, CEN/TS16415	
120 mm x 20 mm x 20 mm	
mat VA	1
196 g	
AP-018-T	

MINIFIX



 EN 795-A	
 -	
	1
mat VA	
	40,08 g
46 g	
AP-026-10	AP-026-12

MAXIFIX 1



Made of a special stainless steel alloy for use in aggressive env.

 EN 795-A, CEN/TS16415

 80 mm x 60 mm x 100 mm



 1
  VA

 700 g

AP-037-1



MAXIFIX 2



	EN 795-A, CEN/TS16415		
	145 mm x 60 mm x 100 mm		
mat	VA		1
	900 g		
AP-037-2			

D-BOLT



	EN 795-A, CEN/TS16415	
	101,3 mm x 46 mm x 79,8 mm	
	2	
mat	St, pulverbeschichtet	
	620 g	col 
AP-058		

Q-BOLT 1



EN 795-A
1
mat V4A
250 g
AP-060-1







Q-BOLT 2



EN 795-A
1
mat V4A
400 g
AP-060-2

D-BOLT-STAINLESS



 EN 795-A, CEN/TS16415	
 101,3 mm x 46 mm x 79,8 mm	
 2	mat V4A
 624 g	
col 	
AP-063-GPS	AP-063-GE

SWIFIX 1



EN 795-A/B, CEN/TS 16415, EN 50308, ANSI Z359.1-2007, OSHA 1926.502
1
mat StVZ
610 g
AP-062-1-12

SWIFIX 2



EN 795-A/B, CEN/TS 16415, EN 50308, ANSI Z359.1-2007, OSHA 1926.502
1
mat StVZ
420 g
AP-062-2-12

INFORMATION



This NEW RANGE of TOP FIX ROOF ANCHORS, PURLIN ANCHORS & LADDER BRACKETS is manufactured in Australia & is an excellent complement to the SKYLOTEC range of industrial height safety equipment.

The FROGLINK top fix roof anchors & RETROLINK Purlin Anchors have successfully passed & therefor compliant to the standard AS/NZS 5532:2013 & also compliant with AS/NZS 1891.4:2009.

The LADDERLINK brackets manufactured from Marine Grade aluminium are the ideal ladder support bracket for compliance with the Australian ladder standard AS 1657-2013.

NOTE: Other variants are available. Consult your Sales Specialist for advice.

FROGLINK
TOP FIX ANCHOR

TEMPLINK - TEMPORARY
ROOF ANCHOR

LADDERLINK FIXED

LADDERLINK FIXED
EXTENDED

LADDERLINK FIXED
BENT



	Standards – Compliant with AS/NZS 1891.4
mat	Stainless Steel 316
	1
SLINK-0005	

	Standards – N/A
mat	Aluminium
	1
SLINK-0015	

	Standards – N/A
mat	Aluminium
	1
SLINK-0016	

	Standards – N/A
mat	Aluminium
	1
SLINK-0017	

RETROLINK TUBE FLAT
PURLIN ANCHOR

LADDERLINK FIXED
POLE BRACKET

LADDERLINK FIXED ROPE
PROTECTOR BRACKET



	Standards – EN 795:2012/CEN/TS 16415:2013 Compliant with AS/NZS 1891.4
mat	Stainless Steel 316
	1
SLINK-0001	

	Standards – EN 795:2012/CEN/TS 16415:2013 Compliant with AS/NZS 1891.4
mat	Stainless Steel 316
	1
SLINK-0003	




	Standards – N/A
mat	Aluminium
	1
SLINK-0018	

	Standards – N/A
mat	Aluminium
	1
SLINK-0019	



ROPE BAG



col	mat			PA
 mat	max. 5 kg	max. 15 kg	max. 25 kg	max. 30 kg
	200 mm	300 mm	300 mm	300 mm
	15 m	50 m	90 m	130 m
ACS-0009-1	ACS-0009-2	ACS-0009-3	ACS-0009-4	




ROPE BAG



col	
 max. 30 kg	 max. 80 m
mat PA	 37 l
 400 x 250 x 250 mm	
ACS-0112	

UNIBAG 11



mat	PA
	0,24 kg
	11 l
	400 x 250 x 110 mm
ACS-0010	





DUFFLE BAG ORANGE



col		
 mat	max. 20 kg	 60 l
mat	PVC/PES	 max. 180 m
	550 x 350 mm	
ACS-0175-OR	ACS-0175-SW	

DUFFLE BAG BLACK



col		
 mat	max. 20 kg	 90 l
mat	PVC/PES	 max. 180 m
	720 x 440 mm	
ACS-0176-SW	ACS-0176-OR	

SKYPACK



col			
 mat	max. 15 kg		max. 60 m
mat	PA		34 l
	520mm x 300mm x 220mm		
ACS-0244			

DRYBAG



mat	PU	col	
 mat	max. 25 kg		max. 30 kg
	max. 170 m		max. 280 m
	300 mm		350 mm
	35 l		59 l
	810 mm		960 mm
ACS-0014-M	ACS-0014-L		

DRYBAG



mat	PU	col	
 mat	max. 25 kg		max. 30 kg
	max. 170 m		max. 280 m
	300 mm		350 mm
	35 l		59 l
	810 mm		960 mm
ACS-0014-OR-M	ACS-0014-OR-L		



DRYBAG ECO



mat	PU	col	
 mat	max. 25 kg		
	max. 230 m		
	400 mm		
	59 l		
	860 mm		
ACS-0088-L			

EQUIPMENT BAG



col		
mat	PA	
	0,15 kg	 6 l
	300 mm	
ACS-0020		

TOBAX K



mat	Cordura®	 8 l
	0,22 kg	
	350 x 250 x 100 mm	
col		
ACS-0019-K		

UNIBAG EXPERT



mat	PA	 1,1 kg
	300 mm	 36 l
	600 x 300 x 200 mm	
col		
ACS-0012		

TOOL BAG PRO LIFT 4K



col			
mat	PA		0,96 kg
	300 mm		40 l
	max. 30 kg		130 m
ACS-0133			


LIFTBAG






With compartment

col			
mat	PA		300 mm
	0,78 kg		25 l
	max. 20 kg		60 m
ACS-0134			

ROPEGUARD






Edge guard for ropes and straps with hook and Velcro fastening strip.

mat	PES
	0,07 kg
	0,40 m
col	
ACS-0039	

LANYARD PARKING RING KIT







Detachable Lanyard Stowage Points

mat	KST		
	0,03 kg		
	-		
col			
ACS-0247			

TOOLKEEPER







maximum retraction force 200 g

mat		KST, AL, PES	
	99 g		max. load capacity 1,6 kg / 56 oz
	max. 1,06 m		
	240 x 55 x 19 mm		
ACS-0249			

TOOLKEEPER CLIP



maximum retraction force 200 g

mat		KST, AL, PES	
	110 g		max. load capacity 0,9 kg / 32 oz
	max. 1,06 m		
	420 x 55 x 19 mm		
ACS-0250			

PLIBAG







for tools and materials, stable base plate

col			
	0,5 kg		max. 15 kg
	300 mm		15 l
	50 m	mat	PA/PU
ACS-0055			

UNIBAG 32







mat	PA		
	0,85 kg		max. 10 kg
	32 l		
	100 m		
ACS-0011-32			

TOOLSAYER



Accessory straps to hold tools & equipment.

mat	VA, PU		
	0,11 kg		5 kg
	700 mm		
col			
ACS-0182			

SKYWASH





Special detergent for ropes and slings.

mat	-
 0,55 kg	
 -	
 0,5 l	
ACS-0127-500	

BOXER 410



with 4 led lights, max. 150 h, incl. batteries

mat	-
	-
 0,12 kg	
	-
ACS-0096	

SLC AL



Aluminium rungs,
incl. ROPE BAG
Gr. 2

mat	PA/AL		
	1,7 kg	2,8 kg	
	5000 mm	10000 mm	
	6 mm		
ACS-0068-5		ACS-0068-10	

SUSPENSION RELIEF STRAPS

INFORMATION

i

The SKYLOTEC **SUSPENSION RELIEF STRAPS** are a short term solution for alleviating suspension trauma after a fall. The term suspension trauma describes a potentially life-threatening shock that can occur with prolonged motionless free hanging in a harness. Blood is no longer directed to the brain, which may initially result in unconsciousness and death shortly after. **SUSPENSION RELIEF STRAPS** stimulate blood circulation and help bridge the time until rescue. The small lifesavers are very lightweight and inconspicuous and can be mounted on the side of almost every safety harness. Therefore, they should always be present when the safety harness is in use. Better safe than sorry!

SUSPENSION RELIEF STRAPS



mat	PA
121 g	
col	
ACS-0189	

SKYCROWN helmets feature an adjustable chin strap as well as a ratchet style rotary adjuster on the inner harness to fit all head sizes.

SKYCROWN



EN 397:2012

mat

ABS

0,43 kg

col

BE-016-SWM

BE-016-BL

BE-016-RO

BE-016-OR

BE-016-WE

BE-016-SWS

ULTRA ROLLSTRETCHER

INFORMATION

i

The **ULTRA ROLLSTRETCHER**, rollable carrier system, is particularly suitable for rescue in areas, which are difficult to access, in confined spaces, shafts and for mountain rescue. The rollstretcher can be used horizontally, angularly and vertical. Thanks to its tube-like form is it characterized by its exceptional stability. The patient is additionally protected by stabilizing elements in the shoulder, thorax, pelvic and spinal areas. The big advantage of the product is this low weight and small storage size on the way to rescue mission, simple and fast assembly on site, flexible and variable handling. The rollstretcher is approved for use by specific German Federal Armed Force helicopters.



+ ULTRA ROLLSTRETCHER



ULTRA ROLL BAG
BACKPACK Storage bag for ULTRA ROLL Stretcher

col	
l	-
600mm x 300mm x 2.000mm	
7,3 kg	
SAN-9000	

ULTRA BASKET STRETCHER




ULTRA BASKET STRETCHER



One piece stretcher is suitable for use in both horizontal & vertical applications. It comes complete with patient restraint straps, 40mm thick removable PVC mattress and footrest. Capacity 315kg

col	
	618mm x 189mm x 2.178mm
	14,0 kg
SAN-0087-1	

ULTRA BELT EXTREM

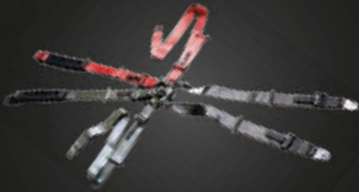

Special 6-point harness for fast and secure fixation of the patient in extreme rescue situations. Even transport of the patient "head over" poses no problem.

col	
	-
	1,8 kg
SAN-0089	

ULTRA BASKET STRETCHER



col	
	618mm x 189mm x 2.141mm
	12,0 kg
SAN-0087-2	

ULTRA STRAPS EXTREME



col	
	-
	1,0 kg
SAN-0286	

ULTRA SCOOP STRETCHER X-RAY



mat	high-quality plastic
	450 mm x 65 mm x 1.650 mm
	9,5 kg
SAN-0288	

ULTRA HEAD LOOK II



mat	-
	220 mm x 170 mm x 380 mm
	0,6 kg
SAN-0285	

S-BOON SPINEBOARD



mat	KST, PE
	1.850 x 430 x 50 mm
	7,5 kg
SAN-0295	

ULTRA BRIDLES



mat	PES/AL
	1600mm
	2,4 kg
SAN-0086	

P 1800 723 343

E skylotec@htch.com.au



SKYLOTEC Australia Pty Ltd

Unit 1, 9-12 Altair Pl
South Penrith NSW 2750
Australia

Ph +61 (2) 4721 3337
Fax +61 (2) 4721 0599


SKYLOTEC GmbH

Im Mühlengrund 6-8
56566 Neuwied
Germany

Tel. +49 (0) 2631 - 96 80 0
Fax. +49 (0) 2631 - 96 80 80

Info: accounts@skylotec.com.au
www.skylotec.com/aus_en

www.skylotec.com

 Distributor label

E 1800 723 343 skylotec@htch.com.au

www